

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 0 893 916 A2**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:

27.01.1999 Bulletin 1999/04

(51) Int Cl.<sup>6</sup>: **H04N 5/70**(21) Application number: **98305888.4**(22) Date of filing: **23.07.1998**

(84) Designated Contracting States:

**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**

Designated Extension States:

**AL LT LV MK RO SI**

(30) Priority:

**24.07.1997 JP 198141/97****28.07.1997 JP 201273/97****18.11.1997 JP 316768/97****04.12.1997 JP 333863/97****11.12.1997 JP 341116/97**

(72) Inventors:

• **Kawahara, Isao****Toyono-gun, Osaka-fu, 563-0214 (JP)**• **Sekimoto, Kunio****Katano-shi, Osaka-fu, 576-0012 (JP)**(74) Representative: **Crawford, Andrew Birkby et al****A.A. THORNTON & CO.****Northumberland House****303-306 High Holborn****London WC1V 7LE (GB)**(71) Applicant: **MATSUSHITA ELECTRIC INDUSTRIAL  
CO., LTD.****Kadoma-shi, Osaka-fu, 571 (JP)**(54) **Image display apparatus and image evaluation apparatus**

(57) An image display apparatus which displays images, suppressing the occurrence of the moving image false edge. The image display apparatus selects a signal level among a plurality of signal levels in accordance

with a motion amount of an input image signal, where each signal level is expressed by an arbitrary combination of 0, W1, W2, ... and WN and luminance weights W1, W2, ... and WN are assigned to subfields.

## Description

### BACKGROUND OF THE INVENTION

#### (1) Field of the Invention

This invention relates to an image display apparatus which uses a display panel, such as a plasma display panel, that displays images by a multi-level gray scale by dividing one TV field of the image into a plurality of subfields, and especially to an image display apparatus which displays images of improved quality. This invention also relates to an image evaluation apparatus which evaluates images displayed in such an image display apparatus.

#### (2) Description of the Prior Art

Image display apparatuses which use display panels based on a binary illumination system, namely, two illumination states in which each pixel can be ON or OFF, represented in this specification by plasma display panels (hereinafter simply referred to as "PDPs"), achieve gray scale displays by methods such as the Address Display Period Separated Sub-Field method. In this method, an image is displayed by dividing the time in one TV field into a plurality of subfields which are each composed of an addressing period in which ON/OFF data is written for each line of a PDP screen and a discharge sustaining period in which predetermined pixels are illuminated all at once.

It is conventionally known that when displaying a moving image in a multi-level gray scale by dividing each TV field of the moving image into a plurality of subfields, gray scale disturbance in the form of "false edge" appears on the screen.

The following is an explanation of an occurrence of such false edges when displaying a moving image. FIG. 35 shows movement of a picture pattern PA1 on a screen of a PDP 240, the picture pattern PA1 being composed of two pairs of adjacent pixels having the similar gray scale levels 127 and 128 respectively. In this example, the picture pattern PA1 moves horizontally by two pixels per TV field. In FIG. 36, the horizontal axis shows a relative position of each pixel on the screen, and the vertical axis shows a period which for convenience's sake corresponds to one TV field. FIG. 36 also shows how the movement of the picture pattern PA1 appears to a viewer. Here, a case is explained in which each piece of 8-bit data indicating one out of 256 gray scale levels is converted into a piece of 8-bit data showing ON/OFF states of eight subfields 1-8. The gray scale display is achieved in accordance with the ON/OFF states of the eight subfields. As a specific example, the time in one TV field is divided into subfields 1-8 which are assigned luminance weights, 1, 2, 4, 8, 16, 32, 64 and 128, respectively (in ascending order). In this case, the gray scale level 127 can be expressed by illuminat-

ing the subfields 1-7 (diagonally shaded areas on the left in FIG. 36) and not illuminating the subfield 8, while the gray scale level 128 can be expressed by not illuminating the subfields 1-7 and illuminating the subfield 8 (diagonally shaded area on the right in FIG. 36).

When displaying a still picture, the average luminance of one TV field of the observed image is expressed by the integral of the illumination periods between A-A' in FIG. 35, so that the desired gray scale level is properly displayed. On the other hand, when displaying a moving image, an integral of the illumination periods of either B-B' or C-C', depending on the direction followed by the eye, is observed on the retina. The total luminance weights assigned to each bit (subfield) between B-B' is approximately 0, while the total luminance weights assigned to each bit (subfield) between C-C' is approximately 255. Thus, when observing the movement of a picture pattern in which two similar gray scale levels, such as the gray scale levels 127 and 128, are adjacent, the boundary between the adjacent pixels of the gray scale levels appear profoundly disturbed as shown in FIG. 36.

As explained above, a halftone is represented by an integral of luminance values of each subfield in a time series. Accordingly, when the eye follows a moving image, luminance weights assigned to the subfields of different gray scale levels are integrated due to the position change. As a result, the halftone display appears profoundly disturbed. It should be noted here that this halftone disturbance appears as false edges in the image, and so generally referred to as the "moving image false edge." Such false edge occurrences in a moving image display are explained in detail in Hiraki Uchiike and Shigeru Mikoshiba, *All About Plasma Display*, Kogyo Chosakai Shuppan, (May 1, 1997), pp. 165-177.

In order to eliminate moving image false edges and reduce halftone disturbance in a moving image display, an attempt has been made with conventional image display apparatuses to divide the luminance weights of the subfields 7 and 8 as upper bits and intersperse the divided parts in the first and second halves of one TV field. FIG. 37 shows a subfield construction in a conventional method for reducing the moving image false edges by using ten subfields to display 8-bit gray scale levels, that is, 256 gray scale levels. The ten subfields are assigned luminance weights of 48, 48, 1, 2, 4, 8, 16, 32, 48, and 48 in order of time. That is to say, the combined luminance weight value of 64 and 128 for subfields 7 and 8 out of the eight subfields described above is divided into four equal luminance weights  $((64+128)/4 = 192/4 = 48)$ , which are then interspersed in the first and second halves of one field to prevent the occurrence of the halftone disturbance by reducing the luminance weights of the subfields of upper bits. With this technique, halftone disturbance is scarcely observed at the boundary between the adjacent pixels of gray scale levels 127 and 128 described above, so that the occurrence of the moving image false edges can be prevented for those val-

ues. However, for a different example, like the two pairs of adjacent pixels having gray scale levels 63 and 64 respectively shown in FIG.37, halftone disturbance is inevitably observed at the boundary between the adjacent pixels. In the drawing, in the pixels of gray scale level 64, a subfield with a large luminance weight (here, the subfield 9) is turned ON while subfields with small luminance weights (here, the subfields 3, 4, 5, 6, and 8) are turned OFF. The distribution of ON/OFF subfields greatly changes from the previous pixels. As a result, halftone disturbance is inevitably observed at the boundary between the adjacent pixels. As shown in FIG.37, the total luminance weights assigned to each bit (subfield) observed in the direction of the dotted line arrow Ya is approximately 79, while the total luminance weights assigned to each bit (subfield) observed in the direction of the dotted line arrow Yb is approximately 32. Thus, it is still not possible to prevent the occurrence of the moving image false edges in such a case.

Also, in the above-described method of evaluating the moving image false edge, the following problems are found. That is, in this method, all the luminance weights of the subfields on the dotted line arrow Ya or Yb shown in FIG.37 are added up to detect the occurrence of the moving image false edge. In such a case, there is a possibility that the total luminance weights assigned to the subfields greatly change when the directions of the dotted line arrows slightly change due to the change of subfields included in these lines, as shown in the dotted line arrow Yc for Ya and Yd for Yb in the drawing. As described above, in the conventional method in which the luminance weights are added up based on a binary determination of ON/OFF subfields on a dotted line, only a slight change in the direction followed by the eye may generate a great difference in the result value of the total luminance weights which is used for the evaluation of the moving image false edge. This leads to a difference between the evaluation result and the actual image observed by a viewer.

Also, another problem of the conventional evaluation method is that the method does not cover slant movements of the image. That is, the conventional method responds only to the horizontal or vertical movements of the image.

Currently, the CRT displays are widely used as television displays. The CRT displays have been used as displays by a lot of users through a long period and the production cost is relatively low. Also, the CRT displays are highly evaluated for the quality of the luminance, contrast, etc. On the other hand, the CRT displays have disadvantages such as the largeness in their size or weight. These disadvantages hinder the use of the CRT displays as, for example, flat television sets which can be hung on a wall. PDPs or Liquid Crystal Displays (LCDs) have been in the spotlight as thin, light-weight displays. Recently, the LCDs, recognized to be suitable for small displays, have widely been used for note-type personal computers. However, it is still difficult to pro-

duce large LCDs. Also, another problem with the LCDs is that the display response characteristic is not satisfactory in displaying moving images, which leads to the occurrence of afterimages and the like. Compared to the LCDs, it is anticipated that the PDPs will be used as wall televisions in future since the PDPs are relatively suitable for large size.

In the usual CRT displays, when one electric beam hits one pixel, the pixel illuminates. At the same time, surrounding pixels also illuminate at a considerable level. This leads to the occurrence of a diffusion of image display and to the degradation of the spatial frequency characteristic. As to these problems, the PDPs and LCDs are given high evaluation that the image is clear. This is because the PDPs and LCDs are matrix-type displays which have a separate electrode for each pixel, helping the displays maintain independence of each piece of image display information for each pixel. However, the LCDs have a problem of afterimages due to the unsatisfactory display response characteristic, as described earlier. In contrast, the PDPs do not have the problem. As a result, the PDPs are highly appreciated as high-quality image display apparatuses all things considered.

Incidentally, in the conventional image display apparatuses using the PDPs, the same signal source and signal processing as the conventional CRT displays are used for the parts of the apparatuses other than the PDPs. As a result, noises included in the input image signals, especially two-dimensional high frequency component noises, are remarkable in the conventional PDP apparatuses, while such noises are not remarkable in the conventional CRT displays. The noises are marked especially in still pictures since they are minute.

## SUMMARY OF THE INVENTION

It is therefore the first object of the present invention to provide an image display apparatus which can reduce occurrences of moving image false edges.

It is the second object of the present invention to provide an image evaluation apparatus which can evaluate images reflecting actual images observed by human eyes moving in any directions.

It is the third object of the present invention to provide an image display apparatus which can display excellent images without being disturbed by noise components of input image signals.

The first object can be fulfilled by setting the luminance weights as  $W_1, W_2, \dots$  and  $W_N$  and by selecting, in accordance with a motion amount, a signal level (gray scale level) among those expressed by arbitrary combinations of 0,  $W_1, W_2, \dots$  and  $W_N$ , and outputting the selected signal level as a display signal, where the motion amount is a change of the input image signal over time.

This technique is very effective in reducing occurrences of moving image false edges. It is needless to say that the effect of the above technique is further en-

hanced by adopting the assignment of luminance weights to the subfields and the arrangement of the subfields.

Here, the error between the input signal and the display signal can nearly be eliminated by calculating a difference between an input signal level and a signal level of a limited display signal and distributing the difference to surrounding pixels.

The above object can also be achieved by an image display apparatus in which one TV field is divided into N subfields arranged in time order which are respectively assigned luminance weights, and the initialization is performed (N - 1) times for each TV field. With this construction, in proportionate to input signal levels in a predetermined range, illumination subfields extend forward or backward over time. This fulfills the first object to reduce occurrences of moving image false edges.

The second object is achieved by an image evaluation apparatus which sets a standard point to a pixel on a virtual image, calculates a course which is formed by a movement from the standard point to a point in a unit time, calculates illumination amounts of pixels which neighbor the course, adds up the illumination amounts, and generates evaluation information, from the total illumination amount, which shows a state of an image displayed on an image display apparatus.

With this image evaluation technique which takes illuminations of pixels neighboring the course into consideration, it is possible to eliminate an unstableness that the evaluation image greatly changes when the original image makes only a slight movement, and provide stable images reflecting actual images observed by human eyes.

The third object is fulfilled by an image display apparatus which suppresses suppresses components that change radically over time among high-frequency components in spatial frequencies of an input image signals.

#### BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects, advantages and features of the invention will become apparent from the following description thereof taken in conjunction with the accompanying drawings which illustrate a specific embodiment of the invention. In the drawings:

FIG. 1 is a block diagram showing the construction of the image display apparatus of Embodiment 1;  
FIG. 2 is a block diagram showing the construction of the second encoding unit 7;  
FIGs. 3(a), 4(a), 5(a), and 6(a) show the subfield conversion table 710;  
FIGs. 3(b), 4(b), 5(b), and 6(b) show the conversion table 60;  
FIG. 7 shows the internal construction of the frame memories of the image display apparatus;  
FIG. 8 is a block diagram showing the construction of the display control unit of the image display apparatus;

paratus;

FIG. 9 shows the illumination method of the PDP of the image display apparatus;

FIG. 10 is a block diagram showing the construction of the filter unit of the image display apparatus;

FIG. 11 is a block diagram showing the construction of the error diffusion unit and the motion amount calculating unit of the image display apparatus;

FIG. 12 is a schematic representation of generation of output signals by the motion amount calculating unit of the image display apparatus;

FIG. 13 is a schematic representation of the error diffusion method of the image display apparatus;

FIG. 14 is a block diagram showing the construction of the image display apparatus of Embodiment 2;

FIG. 15 shows a table used by the fourth encoding unit of the image display apparatus;

FIG. 16 shows the illumination method of the PDP of the image display apparatus;

FIG. 17 shows a table used by the fourth encoding unit of the image display apparatus of another embodiment;

FIG. 18 shows the illumination method of the PDP of the image display apparatus;

FIG. 19 is a function block diagram showing the function of the image evaluation apparatus of another embodiment;

FIG. 20 shows an illumination pattern in a simulation by the image display apparatus;

FIG. 21 is a schematic representation of the image evaluation method used by the image evaluation apparatus;

FIG. 22 is a flowchart showing a procedure of the image display apparatus;

FIG. 23 is a flowchart showing a procedure of the image display apparatus;

FIG. 24 is a flowchart showing a procedure of the image display apparatus;

FIG. 25 shows data showing correspondence between pixels positions and subfield information;

FIG. 26 shows data showing correspondence between pulse illumination times and subfields;

FIG. 27 shows data used by the first encoding unit;

FIG. 28 shows data used by the first encoding unit;

FIG. 29 shows data used by the first encoding unit;

FIGs. 30, 31, 32, and 33 show a table which corresponds to the subfield conversion table 710;

FIG. 34 is a block diagram showing the construction of a variation of the filter unit of Embodiment 1;

FIG. 35 shows a horizontal movement of an image pattern of two pixels in a conventional image display apparatus;

FIG. 36 is a schematic representation of the movement of the image pattern shown in FIG. 35 followed by a human eye; and

FIG. 37 corresponds to FIG. 36 and is used to explain another conventional image display apparatus.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

### <Embodiment 1>

FIG. 1 is a block diagram showing the construction of the image display apparatus of the present embodiment.

As shown in FIG. 1, the image display apparatus of the present embodiment is composed of a filter unit 1, a  $\gamma$  inversed correction unit 2, an A/D conversion unit 3, an error diffusion unit 4, a motion amount calculating unit 5, a first encoding unit 6, a second encoding unit 7, a display control unit 8, and a PDP 9.

The PDP 9 is a display device provided with electrodes so that the screen is a matrix of 640 pixels  $\times$  480 lines, for example, with each pixel having two states of illumination that are namely "on" and "off". Here, gray scale levels can be displayed by expressing each gray scale level as a total of the illumination values for a predetermined time period, namely, a predetermined number of subfields (e.g., 10 subfields), where each subfield is assigned a predetermined number of illumination pulses as a weight. A PDP for monochrome display is described in the present embodiment to simplify the explanation, though the technique of the present embodiment can also be applied to the processing of each color in PDPs for color display which generate pixels using the three colors red (R), green (G), and blue (B).

The filter unit 1, a circuit for removing high-frequency components from spatial frequencies, will be detailed later.

The  $\gamma$  inversed correction unit 2 is a circuit for correcting the  $\gamma$  characteristic (normally,  $\gamma=2.2$ ) which is added to the original analog image signals assuming that the signals are displayed on a CRT. With this correction, the original input signals and the display signals have a linear input/output relationship ( $\gamma=1$ ).

The A/D conversion unit 3 is a circuit for converting the analog image signals to 12-bit image signals.

FIG. 2 is a block diagram showing the construction of the second encoding unit 7.

As shown in the drawing, the second encoding unit 7 is composed of a subfield conversion unit 71, a write address control unit 72, a frame memory 73a, and a frame memory 73b.

The write address control unit 72 generates an addressing signal based on a horizontal synch signal and a vertical synch signal which have been separated from the input image signal.

The subfield conversion unit 71 is a circuit which converts each digital image signal corresponding to a pixel into a piece of field information. Prior to this process, the first encoding unit 6 discards the lower four bits of 12-bit signals (a'') to generate 8-bit signals (a'), converts the 8-bit signals (a') to the digital image signals (b), and outputs the digital image signals (b). Accordingly,

the second encoding unit 7 receives 8-bit digital image signals (b) from the first encoding unit 6.

Each piece of field information, corresponding to a pixel, is divided into 10 pieces of 1-bit subfield information, each of which indicates ON/OFF of the corresponding pixel during one TV field. Here, the subfield conversion unit 71 includes in itself a subfield conversion table 710. The subfield conversion unit 71 refers to the table to assign any of 10 subfields, SF1 to SF10, to each input digital image signal in accordance with the gray scale level of the signal, where the subfields SF1 to SF10 are respectively assigned weights "1," "2," "4," "7," "13," "23," "33," "43," "55," and "74." This subfield-assigning process for each pixel is carried out in synchronization with a pixel clock which is generated by a PLL circuit (not illustrated). Then a physical address is specified for the generated field information corresponding to each pixel by the addressing signal output from the write address control unit 72. The field information is written into the frame memories 73a and 73b for each line, each pixel, each field, and each screen.

FIGs. 3(a), 4(a), 5(a), and 6(a) show the subfield conversion table 710. As shown in these drawings, the subfield conversion table 710 is used for converting each image signal into a piece of field information, where each piece of field information is divided into 10 pieces of subfield information. Each piece of subfield information indicates ON or OFF of the pixel at a corresponding subfield, one of SF1 to SF10. The subfields SF1 to SF10 are respectively assigned weights "1," "2," "4," "7," "13," "23," "33," "43," "55," and "74." In the table, the left-hand column shows input levels, namely, values of 8-bit digital image signals (a'). The table shows, for each input level, a piece of field information and a conversion-result value. Boxes having value "1" indicate that the pixels are ON at the subfields, while boxes without the value indicate that the pixels are OFF at the subfields.

For example, on receiving a digital image signal whose input level is "27" (with  $\otimes$  sign in the table), the subfield conversion unit 71 converts the image signal into field information "1111100000" based on the subfield conversion table 710 and outputs 10-bit data corresponding to the converted field information. The value "31" shown in a corresponding box in the right-hand column is a decimal notation of "0000011111" which is a reversed binary value of the field information "1111100000."

FIG. 7 shows the internal construction of the frame memories 73a and 73b. As shown in the drawing, the frame memory 73a is provided with a first memory area 73a1 and a second memory area 73a2. The first memory area 73a1 stores field information covering former L lines of one screen (line 1 to line L). In the present embodiment, L is "240." The second memory area 73a2 stores field information covering former L lines of another screen (line 1 to line L). The first memory area 73b1 stores field information covering latter L lines of one

screen (line L+1 to line 2L). The second memory area 73b2 stores field information covering latter L lines of another screen (line L+1 to line 2L).

Each of the memory areas 73a1, 73a2, 73b1, and 73b2 is composed of 10 subfield memories, SFM1-SFM10. With this construction, each memory area, in total, stores field information covering two screens for each of the 10 subfields, with each piece of subfield information indicating ON/Off of a corresponding pixel. In the present embodiment, a semiconductor memory of "onebit-input, one-bit-output" type is used as each of the subfield memories, SFM1-SFM10. The frame memories 73a and 73b are two-port frame memories which are capable of simultaneously writing field information into themselves and reading field information to the PDP 9.

Field information is alternately written into the memory areas 73a1, 73a2, 73b1, and 73b2, such that field information of a former half of a present screen is written into the first memory area 73a1; a latter half of the screen is written into the first memory area 73b1; a former half of another screen is written into the second memory area 73a2; and a latter half of the screen is written into the second memory area 73b2. In writing field information into one memory area (73a1, 73a2, 73b1, or 73b2), each bit of the 10-bit data output from the subfield conversion unit 71 in synchronization with the pixel clock is sequentially written into the subfield memories, SFM1-SFM10. Here, it is predetermined which of 10 bits is to be stored into which of the subfield memories, SFM1-SFM10.

More specifically, the subfield numbers, "1" to "10," in the subfield conversion table 710 in the second line are logically associated with the subfield memories SFM1-SFM10. Accordingly, the 10 bits of the 10-bit data are written into respective subfield memories out of SFM1-SFM10: A write position of the 10-bit data in the subfield memories SFM1-SFM10 is specified by the addressing signal outputted from the write address control unit 72. Usually, the 10-bit data is written into the same position as the position of the pixel signal on the screen before the pixel signal is converted into the 10-bit data.

As shown in FIG. 8, the display control unit 8 is composed of a display line control unit 80, an address driver 81a, an address driver 81b, and a line driver 82.

The display line control unit 80 tells the frame memories 73a and 73b which memory area (73a1, 73a2, 73b1, or 73b2), line, and subfield should be read to the PDP 9, and tells the PDP 9 which line should be scanned.

The operation of the display line control unit 80 is synchronized, in a screen unit, with the operation of writing data into the frame memories 73a and 73b by the second encoding unit 7. That is to say, the display line control unit 80 does not read data from memory areas 73a1 and 73b1 (73a2 and 73b2) into which 10-bit data is being written, but reads data from the other memory areas 73a2 and 73b2 (73a1 and 73b1) into which 10-bit

data has already been written.

The address driver 81a converts subfield information into address pulses in parallel in units of lines, each line having 640 bits, and outputs the address pulses as a line in the former part of a screen. Note that the 640-bit subfield information is serially input to the address driver 81a in one-bit unit in accordance with memory area specification, line specification, and subfield specification by the display line control unit 80. The address driver 81b converts subfield information into address pulses in parallel in units of lines, and outputs the address pulses as a line in the latter part of the screen.

The line driver 82 generates scan pulses to specify lines into which the subfield information is to be written.

With this construction of the display control unit 8, field information is read from the frame memories 73a and 73b to the PDP 9 as follows. For reading the field information, two pieces of data for the former half and the latter half of one screen are simultaneously read from the frame memories 73a and 73b, respectively. First, field information is read from the two subfield memories SFM1 simultaneously. Starting from the first line, subfield information for each pixel is read bit by bit, in order from one line to another from the memory areas 73a1 and 73b1 for two parts of a screen, simultaneously. After the first line is specified by the line driver 82, latent images are formed (addressing is carried out) on the first lines of the former and latter parts of the screen. Similarly, the process is repeated for each pair of lines, outputting the subfield information to PDP 9 in parallel and carrying out the addressing, until the last pair of lines for the respective parts of the screen are completed, when each pixel on the screen is simultaneously illuminated.

Similarly, ON/OFF subfield information for the subfield SF2 for each pixel of each line is read from the subfield memory SFM2, and each addressing is carried out. The same operation is successively repeated for the rest of the subfields. On completing this operation for all of the subfields SF1-SF10 for the first memory areas 73a1 and 73b1, the read-out (writing) of field information for one screen ends.

FIG. 9 shows the operation of the PDP 9. In FIG. 9, the horizontal axis shows time, while the vertical axis shows scan/discharge sustaining electrode numbers, the electrodes running across the PDP. Also, a thick slanted line shows an addressing period in which addressing of pixels to be illuminated is carried out, while a shaded area shows the discharge sustaining period for which illumination of the pixels is carried out. That is to say, addressing is performed for all pixels for the scan/discharge sustaining electrode 1 by applying address pulses to the addressing electrodes in the vertical axis of the PDP at the start of the subfield SF1. On completing the addressing of the scan/discharge sustaining electrode 1, the same addressing processing is repeated for the electrode 2, 3, ..., and the last electrode. Completion of the addressing of the last scan/discharge sustaining electrode is followed by the discharge sus-

taining period t1-t2. During this period, a number of discharge sustaining pulses proportional to the weighting of the subfield SF1 are applied to each discharge sustaining electrode, wherein only pixels which have been specified by the addressing as being illuminated are illuminated. By repeating the addressing and subsequent simultaneous illumination of pixels for all ten subfields, a gray-level display of one field is completed. It should be noted here that each addressing is carried out after an initialization period for eliminating wall charges of all pixels. Such a driving method, in which information is previously written into the pixels to be illuminated (addressing), is called "memory driving method."

By reading field information covering the next screen from other memory areas in parallel with the read-out for the current screen, a moving image is displayed.

Now, the characteristics of the encoding by the second encoding unit 7 are described.

In the subfield conversion table 710, the number of subfields is ten. The subfields are respectively assigned weights of 1, 2, 3, 4, 7, 13, 23, 33, 43, 55, and 74 in order of time, as shown in FIGs.3(a), 4(a), 5(a), and 6(a).

In this type of weighting, it is possible to express the luminance of high-order (i.e., great) weights by combining a plurality of low-order (i.e., small) weights. That means, there are cases in which several subfield combinations are possible for displaying a certain gray scale level. For instance, when displaying a digital image signal whose level is 127, a combination of subfields SF10, SF8, SF4, SF2, and SF1, a combination of SF1, SF2, SF10, SF11, and SF12, a combination of SF9, SF8, SF6, SF3, and SF2, and a combination of SF9, SF7, SF6, SF5, SF2, and SF1 are possible.

Among a plurality of possible subfield combinations for representing one gray scale level, one combination is given in the subfield conversion table 710. For the digital image signal of input level 127, the combination of SF9, SF7, SF6, SF5, SF2, and SF1 is given in the table.

It can be said that combinations which minimize the use of subfields with high-order weights are given in the subfield conversion table 710. As shown in the subfield conversion table 710 in FIGs.3(a), 4(a), 5(a), and 6(a), such combinations are used for gray scale levels of middle to high luminance (23-255), excluding gray scale levels of low luminance (0-22).

Also, the following characteristic can be seen in the table. That is, when a subfield with heavier weight is newly turned ON as the input level increases, the subfield with the heaviest weight in the preceding lower input levels is turned OFF. Refer to the table for such instances, such as subfield combinations for input levels 27 and 28, 50 and 51, 83 and 84, 126 and 127, and 181 and 182.

By using such subfield combinations to display an image, radical changes in luminance in a time series are suppressed. This leads to reduction or disappearance of moving image false-edges.

The following are detailed description of characteristics of the present invention.

As shown in FIG.10, the filter unit 1 is composed of a two-dimensional high pass filter 11, a two-dimensional low pass filter 12, a temporal LPF 13 being a time response low pass filter, and an addition unit 14.

The two-dimensional high pass filter 11 outputs image components with minute patterns. Of the output image components, components with radical changes in a time series are suppressed by the temporal LPF 13. The temporal LPF 13 outputs the image components to the addition unit 14.

The addition unit 14 combines the outputs of the temporal LPF 13 and the two-dimensional low pass filter 12. As a result, image components with minute patterns in the input image signals are finally displayed, with the components with radical changes in a time series being suppressed. Thus, components with minute patterns to change in short periods are not displayed. This prevents noises from being displayed. Note that still picture parts are displayed while high-quality image information of the still picture parts are preserved. As a result, both moving and still pictures are displayed with little noise. This is because the high-quality image information is retained for the still pictures and that the response characteristic is not damaged at low spatial frequencies which occupy a large area in the screen when moving pictures are displayed.

The first encoding unit 6 discards the lower four bits of 12-bit signals (a") to generate 8-bit signals (a'), converts the 8-bit signals (a') to the digital image signals (b), and outputs the digital image signals (b) to the second encoding unit 7. The first encoding unit 6 converts input levels a' to certain levels b by referring to the conversion table 60 shown in FIGs.3(b), 4(b), 5(b), and 6(b). The first encoding unit 6, in its encoding process, sacrifices the gray scale level display characteristic and gives priority to reduction of moving image false edges as the amount of image movement increases. Note that the reason for using upper eight bits out of 12 bits of the original signals is to increase the number of false gray scale levels to be displayed.

The conversion table 60 shows selectable signal levels (gray scale levels) for each motion amount (0-9). In the table, the left-hand column shows signal levels, namely, values of 8-bit digital image signals (a') which also are selectable gray scale levels. The right-hand column shows the corresponding motion amounts (m) which are used to select output signal levels (gray scale levels). The ● sign indicates a motion amount. Each line of ● signs indicates a gray scale level which can be selected for each of the motion amounts included in the line. Note that the first encoding unit 6 receives signals from frame memories (not illustrated) storing at least image signals of two frames, where each frame corresponds to one screen for a time period of one field. This is because the motion amount calculating unit calculates motion amounts in parallel with the encoding proc-

ess of the first encoding unit 6, and that motion amount calculation is performed using image signals of two successive frames.

The motion amount calculating unit 5 is composed of a frame memory 51a, a frame memory 51b, a motion amount detecting unit 52, a slant block detecting unit 53, and a motion amount correcting unit 54.

The motion amount detecting unit 52 compares image signals in the frame memory 51a with those in the frame memory 51b for each pixel. When the difference value obtained from the comparison exceeds a predetermined value, the case is regarded as a motion. The difference value is classified into a predetermined number of representative values, namely motion amount values. In the present embodiment, it is classified into 10 motion amount values, "0000" to "1001," where "0000" indicates no motion amount. The motion amount detecting unit 52 outputs these four-bit values as the motion amount values. High motion amount values indicate great motions (changes) in the corresponding pixels of two frames.

The slant block detecting unit 53 detects slant blocks from the same frame, where the slant blocks include adjacent pixels between which the signal values for the pixels change. The slant blocks are differentiated from the edge blocks which include adjacent pixels between which the signals change greatly. The slant block detecting unit 53 outputs a four-bit value "1111" for a slant block pixel, and outputs a value "0000" for an edge block pixel, a pixel having no change, and a "flat block" pixel having only a slight change. Note that a known edge detecting filter is used as the slant block detecting unit 53. The known edge detecting filter detects a slant angle for the horizontal and vertical directions and determines the presence of a slant block based on the angle in any of the directions.

The motion amount correcting unit 54 receives the motion amount values from the motion amount detecting unit 52 and corrects the values based on the corresponding outputs received from the slant block detecting unit 53, and outputs the corrected motion amount values. The correction is made as follows: when motion amount value "0000" is received, value "0000" is output regardless of the output from the slant block detecting unit 53; when any motion amount value out of "0000" to "1001" is received from the unit 52 and value "1111" is received from the slant block detecting unit 53, the received motion amount value is output as it is; and when any motion amount value out of "0000" to "1001" is received from the unit 52 and value "0000" is received from the slant block detecting unit 53, value "0000" is output. The reason for the last process of the above is that even if there is a motion, image patterns of the edge block or the flat block do not occur the moving image false-edges. That is, in this case, the first encoding unit 6 gives priority to the gray scale level. Note that the motion amount value  $m$  is represented by the decimal notation in the following description and in the conversion

table 60 shown in FIGs. 3(b), 4(b), 5(b), and 6(b) to simplify the explanation.

As shown in FIG. 11, the error diffusion unit 4 is composed of an addition unit 41, an error calculation unit 42, delay units 43a-43d, and coefficient units 44a-44d.

The error calculation unit 42 calculates a difference  $c$  between the 8-bit level  $b$  output from the first encoding unit 6 and level  $a$  of a 12-bit input signal  $a$ .

The delay unit 43a delays the difference  $c$  by one pixel (1D). The delay unit 43b delays the difference  $c$  by (one line (1H) + one pixel (1D)). The delay unit 43c delays the difference  $c$  by line (1H). The delay unit 43d delays the difference  $c$  by (one line (1H) - one pixel (1D)).

The coefficient units 44a-44d assign a value to the difference value  $c$  in accordance with a corresponding coefficient. The addition unit 41 adds the assigned value to the input signal level, and outputs the processed signal to the first encoding unit 6. Generally, such a method is called error diffusion method. Accordingly, after this process, the first encoding unit 6 receives the signal  $a$  which has an addition result of an input level of the previous input signal and the assigned value. Note that the error diffusion process is performed for both moving and still images. This is because an error is detected even in still images due to the discard of four bytes executed by the first encoding unit 6.

Now, the operations of the first encoding unit 6 and the error diffusion unit 4 are described in detail.

As understood from a comparison of the subfield conversion table 710 shown in FIGs. 3(a), 4(a), 5(a), and 6(a) with the conversion table 60 shown in FIGs. 3(b), 4(b), 5(b), and 6(b), there are correlation between these tables.

The first encoding unit 6 converts each input signal level (gray scale level) into a certain output signal level (gray scale level) by referring to the conversion table 60. As shown in the tables 710 and 60, the highest motion level ( $m=9$ ) corresponds to the signal levels with the combinations of subfields that do not illuminate or subfields that illuminate successively, that is signal levels 0, 1, 3, 7, 14, 27, 50, 83, 126, 181, and 255 (boxes outlined by a thick line in the table 710), which is the case in which the moving image false edge occurs in the least. As a result, when receiving a signal level with motion amount 9, the first encoding unit 6 outputs one signal level (gray scale level) selected from 0, 1, 3, 7, 14, 27, 50, 83, 126, 181, and 255 which is close to the input signal level. As for the signal levels with motion levels lower than the maximum motion amount ( $m=9$ ), the first encoding unit 6 selects a signal level in proportionate to the luminance weight assigned to a subfield which turns ON after an OFF-subfield. More specifically, the first encoding unit 6 selects a signal level including an ON-subfield with a larger luminance weight succeeding to an OFF-subfield as the first encoding unit 6 receives a signal level with a smaller motion amount, that is they are in an inverse proportion. Such signal levels including ON-subfields



with large luminance weights will tend to generate the moving image false edge if they have large motion amounts. Thus, this arrangement contributes to suppressing of the occurrence of the moving image false edge. In other words, as the motion amount of the input signal level increases, the first encoding unit 6 selects a signal level with a long successive illumination time.

In such an encoding process, namely, a signal level selection in proportion to a motion amount value, the moving image false edge is suppressed with a high accuracy when the motion amount is large. Also, the number of selectable gray scale levels increases as the motion amount decreases, where the possibility of the occurrence of the moving image false edge decreases. Accordingly, the first encoding unit 6 selects one out of maximum number of 256 gray scale levels as an output signal level for each input signal of a still picture whose motion amount is "0." That is, for an input signal of a still picture or having little motion, where the motion amount  $m$  is "0," as indicated by the ● signs in the conversion table 60 shown in FIGs. 3(b), 4(b), 5(b), and 6(b), all of the 256 types of gray scale levels are available for the output signal levels. Hence, in case of a still picture, the following equation holds:

input  $a'$  = encoded output  $b$ . Thus, the still pictures are displayed with 256 gray scale levels.

As the motion amount  $m$  increases, the number of selectable gray scale levels decreases. When the motion amount  $m$  is maximum "9," the number of selectable gray scale levels is eleven, the selectable gray scale levels being 0, 1, 3, 7, 14, 27, 50, 83, 126, 181, and 255, as described earlier. The number of selectable gray scale levels is determined as follows. The gray scale levels 1, 3, 7, 14, 27, 50, 83, 126, 181, and 255 are respectively assigned weights  $W_1$  to  $W_{10}$ . The number of selectable gray scale levels is therefore 11 including signal level 0. In this way, the number of selectable gray scale levels is expressed as  $N+1$  when the weights range from  $W_1$  to  $W_N$ . The number of selectable gray scale levels is increased as the motion amount decreases.

The first encoding unit 6 selects a signal level which is close to an input signal level ( $a'$ ) based on the conversion table 60. For example, for motion amount "9," the first encoding unit 6 selects signal level 1 for input signal levels 1-2, selects level 3 for input signal levels 3-6, selects level 7 for input signal levels 7-13, selects level 14 for input signal levels 14-26, selects level 27 for input signal levels 27-49, selects level 50 for input signal levels 50-82, selects level 83 for input signal levels 83-125, selects level 126 for input signal levels 126-180, selects level 181 for input signal levels 181-254, and selects level 255 for input signal level 255.

As a result, in this case of 11 types of illuminations, as the input signal level increases, the number of successive ON subfields increases, that is, the time period of continuous illumination extends (see boxes outlined by a thick line in the table 710). That indicates that the correlation between the largeness of the input signal lev-

el and the illumination pattern is secured. That is to say, the pixel corresponding to the signal keeps on illuminating in proportionate to the largeness of the input signal level. This is a simple relationship. In such a case, the distribution of ON/OFF subfields, namely illumination pulses as the weights, extends in a simple manner as the signal level increases. By using such limited illumination patterns, the occurrence of the moving image false edge can be suppressed.

Such a simple correlation between the largeness of the input signal level and the illumination pattern holds for a case where the motion amount value ranges from 1 to 8. In this case, the number of selectable signal levels for small motion amount values is larger than the case of motion amount values 0 to 9. As a result, the illumination pattern may change rather radically over time. The number of selectable signal levels increases as the motion amount value decreases. This is because the change in the ON/OFF subfield distribution less affects the occurrence of the moving image false edge when the motion amount is small than when the motion amount is large.

Incidentally, it may seem that 11 selectable gray scale levels, as one example which is the case of the maximum motion amount, are insufficient to display images that appear natural, though the occurrence of the moving image false edge may be suppressed. The error diffusion unit 4 performs the error diffusion process to solve this problem. That is, the error diffusion unit 4 distributes the error  $c$ , which is obtained as the difference between input signal level ( $a'$ ) and encoded output signal level ( $b$ ), to adjacent pixels to reduce the mean error. More specifically, as shown in FIG. 13, the error diffusion unit 4 obtains error  $c$  for pixel  $P$ , and distributes the obtained error  $c$  to the adjacent pixels  $A$ ,  $B$ ,  $C$ , and  $D$ . The distribution coefficients are determined as follows for example: 7/16 of the error  $c$  is distributed to pixel  $A$ , 1/16 to pixel  $B$ , 5/16 to pixel  $C$ , and 3/16 to pixel  $D$ . The original image signals are encoded again after the distributed error is added to the signals. By repeating this process, newly obtained errors are distributed to adjacent pixels in succession, and the mean display luminance becomes almost equal to the mean luminance of the input signals. This compensates the gray scale display.

It should be noted here that the error to be distributed is large when the motion amount is large, and that such errors may appear to be noises. However, in the actual viewing, the eye moves as it follows a moving image. Therefore, the viewer can view the displayed image, almost unannoyed by the noises generated by the error distribution.

In case of the still pictures, the noises, what is called diffusion error, are not observed since 256 gray scale levels are available for the encoded output signal ( $b$ ). Also, the error diffusion process is performed using 12-bit data for calculation, and the process is also performed for still pictures. Accordingly, it is possible to use more than 256 false gray scale levels for the still picture

areas.

#### <Embodiment 2>

FIG. 14 is a block diagram showing the construction of the image display apparatus of Embodiment 2. The image display apparatus of Embodiment 2 includes a filter unit 1, a  $\gamma$  inversed correction unit 2, an A/D conversion unit 3, a display control unit 8, and a PDP 9, which are the same as Embodiment 1, and also includes a third encoding unit 101 and a fourth encoding unit 102. The components used in Embodiment 1 have the same functions in the present embodiment.

The third encoding unit 101 only discards the lower four bits of 12-bit signals to generate 8-bit signals, and does not perform the process based on the motion amount as performed by the first encoding unit of Embodiment 1.

The fourth encoding unit 102 converts the 8-bit signals output from the third encoding unit 101 into field information each piece of which is divided into 19 pieces of 1-bit subfield information, each of which indicates ON/OFF of the corresponding pixel during one TV field. The 19 pieces of subfield information respectively correspond to 19 subfields, SF1-SF19. As shown in FIG. 15, these subfields are assigned luminance weights of 16, 16, 16, 16, 16, 16, 16, 16, 16, 16, 16, 16, 16, 8, 4, 2, and 1 in order of time. The subfields are divided into a first subfield group including 15 subfields with luminance weight 16 and a second subfield group including the four succeeding subfields. The total luminance weight value of the second subfield group ("15" in the present embodiment) is set so that it does not exceed the maximum luminance weight of the first subfield group ("16" in the present embodiment). Also, the luminance weights of the second subfield group are set so that they, by combination, cover the luminance weights not included in the first subfield group ("1"- "15" in the present embodiment). With this arrangement, all the input signal values (gray scale levels) are expressed by combining the luminance weights assigned to the subfields of the first and second subfield groups.

Each signal level is converted by the fourth encoding unit 102 into a piece of 19-bit field information which has a illumination pattern indicated by the ● signs shown in FIG. 15. The display control unit 8 displays images on the PDP 9 using the 19-bit field information. Note that in reality, the combination patterns of S16 to S19 are used to express input signal levels 16 to 255, as well as the combination patterns of S1 to S15. However, these patterns are omitted in FIG. 15 for the sake of conveniences.

FIG. 16 is a schematic representation of an illumination method used for the PDP 9 of the present image display apparatus. In Embodiment 2, the method of Embodiment 1 is also used in which one screen is divided into an upper part and a lower part and the addressing is simultaneously carried out for the two parts. As shown

in FIG. 16, each TV field includes initialization periods R1 to R5 in which the electric charge of the panel is initialized. This initialization corresponds to an erasure of a whole screen. In the succeeding addressing periods (represented as A in the drawing), voltage is selectively applied to the pixels to be illuminated. This forms what is called wall charge for each pixel to be illuminated. Illuminations occur actually in display periods (D1 to D19 in the drawing). Note that the numerals in parentheses following the descriptions of D1 to D19 in the drawing indicate the luminance weights mentioned earlier (This applies to all the instances that appear later).

In the present example, initialization is performed only five times (in R1 to R5). More specifically, the first subfield group of SF1 to SF15 has only one initialization period R1 in front of the address period for SF1. No initialization periods are provided in front of SF2 to SF15. Accordingly, each pixel continues to illuminate from the start, holding the wall charge, until immediately before the initialization period R2 that follows SF15. As for the second subfield group composed of four subfields with small luminance weights, the start and stop of the illumination of each subfield are independently controlled, with initialization periods R2 to R5 formed ahead of the respective addressing periods, as in conventional driving methods.

With such encoding and driving methods, as the input signal level increases, the illumination start position is close to the first subfield, and the illumination period extends towards the first subfield. That is to say, the correlation between the largeness of the input signal level and the illumination pattern is secured (refer to an arrow Y1 in FIG. 15). This suppresses the occurrence of the moving image false edge, as described earlier.

It should be noted here that though the distribution of ON/OFF subfields is irregular in SF16 to SF19, the luminance weights assigned to these subfields are small enough to be neglected as an effect on the occurrence of the moving image false edge.

Also, according to the present embodiment, a small number of five initialization periods are provided in one TV field which includes 19 subfields in total. This greatly reduces the time taken for the initialization process which is necessary to control the illumination of each pixel. Accordingly, it is possible for the present image display apparatus to include more subfields in total than conventional techniques.

In case of a PDP having 480 lines which are divided into two parts to be driven simultaneously, the total display period for one TV field is expressed as follows:

$$(1/60) \times 1000,000\mu s -$$

$$(300\mu s \times 5 + 2\mu s \times 240 \times 19) = 6,000\mu s,$$

where one initialization period is assumed to have 300 $\mu$ s, and the addressing period for one line is as-

sumed to have 2 $\mu$ s. On the assumption that each illumination pulse has a cycle of 5 $\mu$ s, 6,000 $\mu$ s/5 $\mu$ s = 1,200 cycles in the display period for one TV field. The value indicates that enough luminance are secured for illumination.

#### <Embodiment 3>

The image display apparatus of Embodiment 3 with a multi-gray-scale display feature has the same construction as Embodiment 2, but uses a different driving method. The difference is described below.

The fourth encoding unit 102, as in Embodiment 2, converts the 8-bit signals output from the third encoding unit 101 into field information each piece of which is divided into 19 pieces of subfield information corresponding to subfields SF1-SF19. In the present embodiment, however as shown in FIG. 17, the subfields are assigned luminance weights of 1, 2, 4, 8, 16, 16, 16, 16, 16, 16, 16, 16, 16, 16, 16, 16, 16, 16 in order of time, in a different manner from Embodiment 2. The subfields are divided into a first subfield group including 15 subfields with luminance weight 16 and a second subfield group including the four preceding subfields. That is, the positions of the first and second subfield groups are changed, compared with Embodiment 2. Each signal level is converted by the fourth encoding unit 102 into a piece of 19-bit field information which has a illumination pattern indicated by the ● signs shown in FIG. 17. The combination patterns of S16 to S19 are omitted also in FIG. 17 for the sake of conveniences.

FIG. 18 is a schematic representation of an illumination method used for the PDP 9 of the present image display apparatus. As shown in the drawing, each TV field includes initialization periods R1 to R5 in which the electric charge of the panel is initialized. In the initialization periods R1 to R4, the whole screen is erased. In the initialization period R5, the whole screen is written. In the addressing periods A of the second subfield group, voltage is selectively applied to the pixels to be illuminated. This forms, as in Embodiment 2, what is called wall charge for each pixel to be illuminated. In the addressing periods A of the first subfield group, voltage is selectively applied to the pixels to be erased so that information for erasure is written in the pixels not to be illuminated. Generally, address pulses are applied to the pixels to be illuminated to form electric charges. However, in this case, pulses are applied to all the pixels assuming that all the pixels are to be illuminated, then pixels not to be illuminated are selectively discharged. Japanese Laid-Open Patent Application No.6-1E6929 explains the addressing method in detail.

With the above addressing method, a total of five initialization periods are provided (R1-R4 for erasing whole screen, and R5 for writing whole screen). This greatly reduces the time taken for the initialization process, and achieves an encoding as described in Embodiment 2. That is, as the input signal level increases, the

illumination subfields extends backwards over time (refer to an arrow Y2 in FIG. 17). When this happens, the illumination pattern is secured and the occurrence of the moving image false edge is suppressed.

#### <Embodiment 4>

Embodiment 4 introduces an image evaluation apparatus. The image evaluation apparatus evaluates images displayed on image display apparatuses, such as PDPs, which are based on pulse illuminations based on a subfield driving method. The image evaluation apparatus is achieved by a commercial personal computer (not illustrated) with a general hardware structure including a CPU, a memory (ROM, RAM, etc.), a keyboard, a hard disc, and a display. However, the present image evaluation apparatus is different from a general computer system in that it stores an image evaluation program in the hard disc so that the CPU runs the program.

FIG. 19 is a function block diagram showing the function of the image evaluation apparatus of the present embodiment.

As shown in the drawing, the image evaluation apparatus is composed of a subfield information setting unit 201, a subfield encoding unit 202, a standard point setting unit 203, an eye course calculating unit 204, a pulse generation time calculating unit 205, an eye position calculating unit 206, a neighboring pixel selecting unit 207, a neighboring pixel coefficient calculating unit 208, a coefficient multiplying unit 209, and an illumination amount totaling unit 210.

The subfield information setting unit 201 sets information for dividing each TV field into a plurality of subfields. For the sake of general explanation, it is supposed here that the subfield information setting unit 201 sets information so that the pulse illumination is performed in each subfield in accordance with the luminance weight assigned and that it is performed N times in total during one TV field. For example, as shown in FIG. 20, the pulse illumination is performed once during the first subfield, twice during the second subfield, four times during the third subfield, eight times during the fourth subfield, and 255 times in total during one TV field.

The subfield encoding unit 202 converts input image signals into subfield signals based on the subfield information set by the subfield information setting unit 201. In doing so, the subfield encoding unit 202 refers to a table corresponding to the table shown in FIGs. 3(a), 4(a), 5(a), and 6(a).

The standard point setting unit 203 sets one pixel on a virtual screen as a standard point, the virtual screen being displayed with data output from the subfield encoding unit 202.

The eye course calculating unit 204 calculates, based on motion vectors, an "eye course" which is formed as a human eye follows an image in a predeter-

mined area of the screen. The motion vector introduced in the present embodiment is a vector showing a motion amount and a direction of a certain image per unit time.

FIG.21 is a schematic representation of the image evaluation method used by the present image evaluation apparatus. In the drawing, each quadrangle represents a pixel on the screen.

The eye course calculating unit 204 creates an X-Y coordinate system, where the origin of the coordinate system is set as a predetermined position (the upper-left corner, in this example) in the standard-point pixel set by the standard point setting unit 203. The eye course calculating unit 204 calculates the skipped based on motion vectors ( $V_x, V_y$ ) represented in the X-Y coordinate system. FIG.21 shows a movement of pixel P to the position of pixel Q by four pixels to the right and three pixels downward during one TV field. Note that here the calculation of the skipped is based on an assumption that there is strong correlation between a movement of an image on the screen and the movement of a human eye following the image.

The pulse generation time calculating unit 205 calculates the time when each illumination pulse is generated. The pulse generation time calculating unit 205 calculates this based on the order of the subfields set by the subfield information setting unit 201 and the luminance weights assigned to the subfields.

The pulse generation time calculating unit 205 also uses known time periods, such as a period required for the initialization, a period required for the addressing, and a period between the current pulse illumination and the next one to calculate each time of illumination pulse generation. Note that a clocking is performed by using the initialization start time as a standard time, and that the time for one pulse illumination is close to one point.

The eye position calculating unit 206 calculates a position on the screen marked by human eye at a time when an illumination pulse is generated, or applied to a pixel. The eye position calculating unit 206 calculates this based on the illumination pulse generation time and the calculated skipped. More specifically, the eye position calculating unit 206 calculates the "eye position" using the illumination pulse generation time calculated by the pulse generation time calculating unit 205 and the motion vectors ( $V_x, V_y$ ) representing motion amounts of an image per unit time.

The neighboring pixel selecting unit 207 selects pixels which neighbor an skipped based on the eye position calculated by the eye position calculating unit 206. In doing so, the neighboring pixel selecting unit 207 assumes on the skipped a quadrangle having the same area as the pixel on the screen. Then the neighboring pixel selecting unit 207 selects among the pixels included in the quadrangle pixels, to which illumination pulses are applied, as the neighboring pixels. For example, as shown in FIG.21, pixels R1 to R4 are selected as the neighboring pixels for the position  $k_i(x, y)$  that is on the skipped.

The neighboring pixel coefficient calculating unit 208 calculates operation coefficients for the neighboring pixels selected by the neighboring pixel selecting unit 207. More specifically, the operation coefficients, which are called neighboring pixel coefficients, are areas of the neighboring pixels.

The coefficient multiplying unit 209 multiplies the illumination amounts of the neighboring pixels by the neighboring pixel coefficients. In doing so, evaluation values for the position  $k_i(x, y)$  are obtained by adding up the result values of the above multiplication.

By adopting such an evaluation method which takes illuminations of pixels neighboring the eye course into consideration, it is possible to obtain an evaluation image which is close to an actual image. This is because the method reflects an effect (what is called a "moving-body eyesight" effect) that the eyesight is degraded against moving images compared to the eyesight against still images.

The illumination amount totaling unit 210 adds up the values obtained by the coefficient multiplying unit 209 for each TV field. The total illumination amount for one screen for one TV field obtained by the unit 210 is output as an evaluation image.

More specifically, the illumination amount totaling unit 210 adds up the evaluation values included in an eye course from the standard point P (pixels P) to pixel Q to obtain an illumination amount for the present pixel.

As evaluation image is obtained after the above-described process is repeated for all the pixels in one screen.

Now, the operation of the present image evaluation apparatus is described with reference to the flowcharts shown in FIGs.22-24.

The apparatus waits for an image input. It is judged whether an image has been input (step S1). When it is judged so, subfield information is generated and stored in a hard disc (S2). FIG.25 shows the construction of the subfield information. As shown in the drawing, the subfield information is related to each pixel position and motion vector MV. In FIG.25, the numerals in the parentheses of pixel positions P(1,1) to P(n,m) respectively show the pixel positions in the horizontal and vertical directions in an evaluation image which corresponds to an actual display screen. It should be noted here that the source of the subfield information, namely the table shown in FIGs.3(a), 4(a), 5(a), and 6(a), is set by a person in charge of the evaluation (evaluator) and is stored in a memory or a hard disc.

It is judged whether a standard point PI has been input (S3), where I (alphabet) indicates a standard point value ranging from "1" (numeral) to 1max. In the present embodiment, the evaluator specifies a pixel as the standard point through a keyboard. It is needless to say that it may be programmed in advance that each pixel in a screen is selected as the standard point.

"I" (alphabet) is set to "1" (numeral) (S4). The following steps S5-S12 are repeated for each standard

point. An X-Y coordinate system is created by setting the origin of the coordinate system as the upper-left corner of the standard-point pixel PI (S5) (see FIG.21).

The motion vector MV corresponding to the pixel PI is read out. The eye course k and a course end point QI of one TV field are calculated using the motion vector MV (S6).

The eye position  $k_i$  at each pulse illumination time  $t_i$  ( $i = 1, 2, \dots, 255$ ) is calculated (S7).

"i" is set to "1" (S8). An evaluation area corresponding to one pixel is set around the eye position  $k_i$  (S9).

FIG.26 shows a table stored in the hard disc which shows correspondence between the subfields SF1 to SF8 and the pulse illumination time  $t_i$ .

It is judged whether each pixel (R1 to R4 in FIG.21) in the evaluation area illuminates at the pulse illumination time  $t_i$  by referring to the tables shown in FIGs.25 and 26 (S10). More specifically, the table shown in FIG. 26 is referred to to detect a subfield SFs that corresponds to the pulse illumination time  $t_i$ . Then, the table shown in FIG.25 is referred to to determine whether each pixel in the evaluation area illuminates during the subfield SFs. It should be noted here that the pixel position in the original image is obtained by a parallel displacement of the pixel position in the X-Y coordinate system. Also, the contents of the table shown in FIG.26 is updated each time the evaluator sets a new source for the subfield information. This eventually updates the contents of the table shown in FIG.25 which is made based on the table shown in FIG.26.

When it is judged that pixels in the evaluation area illuminate at the pulse illumination time  $t_i$  in step S10, a ratio of the area of an illumination pixel to the area of the evaluation area is calculated for each of the illumination pixels, assuming the area of the evaluation area is "1" (S11). An illumination amount  $A_i$  for the eye position  $k_i$  is obtained by adding up each result which is obtained by multiplying an illumination amount per one pulse illumination by each area ratio (S12). It should be noted here that the use of the above-described area ratio may not reflect a whole illumination amount of one pixel if the area of the evaluation value exceeds the pixel. However, the larger the evaluation area is set, an effect of neighboring pixels in broader area should be considered. This will reduce the accuracy of the evaluation. Accordingly, it is anticipated that this method maintains the evaluation accuracy at the same level as a case in which a smaller area is set for the evaluation area than this method. This is achieved by setting small operation coefficients for the neighboring pixels to reduce the effect by the illumination of the surrounding pixels.

It is judged whether "i" is equal to "imax" (=255) (S13). When the judgement is negative, "i" is incremented by "1" (S14). In this way, the steps S9 to S12 are repeated for each of the succeeding pulse illumination times  $t_2$ - $t_{255}$ .

When it is judged that no pixels in the evaluation area illuminate in step S10, control goes to step S14 to

process for the next pulse illumination time.

All the illumination amounts  $A_i$  obtained in the steps S9 to S14 are added up to obtain an observed illumination amount for the standard point PI (S15). It is judged whether all the standard points have been processed by judging whether "I" is equal to "Imax" (S16). When the judgement is negative, "I" is incremented by "1" (S17) and control returns to step S5. In this way, the steps S5 to S15 are repeated until the observed illumination amount is calculated for each standard point.

When it is judged that all the standard points have been processed in step S16, control proceeds to step S18. The original signal levels are replaced by the observed illumination amounts for respective pixels. The composite image generated by this is displayed on the display of the computer system (S18). The evaluator evaluates the displayed composite image.

In the above description, the subfield information for all the pixels is generated in advance in step S2. However, this process may be executed when the illumination amounts for all the eye positions are added up. That is, as the evaluation area is set in step S9, the pixels included in the evaluation area are determined. The determined pixels affect the illumination amount for the eye position. The subfield information for the determined pixels may be generated at this stage to check for the illumination subfields.

As described above, the evaluation method of the present embodiment takes illuminations of pixels neighboring the eye course into consideration by performing a certain calculation for the neighboring pixels. This provides an advantage to the present invention over a conventional method in which a calculation is performed only for one pixel on the eye course. That is, the present invention eliminates an unstableness that the evaluation image greatly changes when the original image makes only a slight movement. Also, it is possible for the present invention to set the eye course in an arbitrary direction, such as in the vertical, horizontal, or slant direction. This enables the evaluation person to evaluate images in a stable manner since the evaluation image correctly reflects the movement of the original image observed by a viewer.

Also, in terms of the image quality, the evaluation image completely matches the original image in case of still pictures when the motion vectors are "0." Accordingly, in case of still pictures, the evaluation person observes the same image as a viewer of the original image.

The present image evaluation apparatus can obtain by calculation the same image as an image obtained by recording a moving image on the screen using a pixel-based video recorder, such as a CCD camera. However, in reality, it is difficult with a CCD camera to evaluate excellently reproduced images since a repetitive, high-speed scanning is required. In contrast, the present image evaluation apparatus provides highly reliable image evaluation by simulations with excellently reproduced images.

## &lt;Others&gt;

(1) In Embodiment 1, 10 levels of motion amounts are detected. However, the process may be varied as follows. In the first stage, it is judged whether an input image is a moving image or a still image; and in the second stage, one signal level selected among limited signal levels is output in case of a moving image, and the input signal is output as it is in case of a still image. Also, it is possible to detect the motion amount in three levels: radical, middle, and none, and encodes input signals in accordance with the motion amount levels.

Also, in the above embodiment, the 10 subfields are assigned luminance weights 1, 2, 4, 7, 13, 23, 33, 43, 55, and 74, respectively. However, the luminance weights may be set as 1, 2, 4, 8, 16, 24, 32, 48, 56, and 64.

Alternatively, 12 subfields may be used, with luminance weights 1, 2, 4, 8, 12, 16, 24, 28, 32, 36, 44, and 48. It is also possible to use 11 subfields, with luminance weights 1, 2, 4, 8, 16, 24, 32, 36, 40, 44, and 48.

It is also possible to use 9 subfields, with luminance weights 1, 2, 4, 8, 16, 32, 48, 64, and 80.

It is also possible to use 8 subfields with luminance weights 1, 2, 4, 8, 16, 32, 64, and 128 which has been introduced earlier as a conventional combination that may cause a moving image false edge. In this case, first, it is judged whether a motion amount is detected or not (motion amount "0"). When a motion amount is detected, output signal levels are limited. FIG. 28 shows an example of the signal limitation. As shown in the drawing, input signal levels grouped as shown in the left-hand column are converted to corresponding encoded signal levels shown in the right-hand column to suppress the occurrence of the moving image false edge. When a motion amount is not detected (motion amount "0"), all gray scale levels (0-255) are available. Here, it is also possible to classify the motion amount into three levels of "radical," "middle," and "none," and limit selectable signal levels in proportionate to the motion amount levels. That is, as the motion amount decreases, the number of selectable signal levels increases. In other words, as the motion amount decreases, the number of selectable signal levels is given a higher priority. For example, the limitations as shown in FIGS. 27, 28, and 29 may be used respectively for "radical," "middle," and "none" motion amounts.

In general, as the number of subfields increases, the change of luminance weights is reduced and the change of illumination/non-illumination for the subfields is also reduced. As a result, it may be said that the effect of suppressing the occurrence of the moving image false edge is remarkable when one TV field includes a lot of subfields.

It should be noted here that the luminance weights may be assigned to the subfields in descending order, as shown in FIGs. 30, 31, 32, and 33 which correspond to FIGs. 3(a), 4(a), 5(a), and 6(a).

(2) The filter unit 1 of Embodiment 1 may have a construction as shown in FIG. 34. As shown in the drawing, the filter unit 1 is composed of a temporal HPF 301 being a time response high pass filter, a temporal LPF 302 being a time response low pass filter, a two-dimensional low pass filter 303, and an addition unit 304.

With such a construction, the temporal HPF 301 outputs only components with radical changes in a time series out of the components of input image signals. The two-dimensional low pass filter 303 suppresses high spatial frequency components of the components output from the temporal HPF 301. The addition unit 304 combines the outputs of the two-dimensional low pass filter 303 and the temporal LPF 302. As a result, an image is finally displayed by suppressing the components that radically change in a time series and have minute patterns.

Accordingly, the present construction of the filter unit 1 also generates the same effect as Embodiment 1. That is, components with minute patterns to change in short periods are not displayed. This prevents noises from being displayed. Also, by adopting the present construction, high spatial frequency components are maintained. When this happens, moving images are displayed without degradation of response characteristics and are displayed without degradation of image quality where minute components of the images are not displayed or the like.

(3) In Embodiment 1, the motion amount is detected by calculating the differences between signal levels of two different frames for each pixel, and using the differences as variation values. However, the motion amount may be obtained by other methods. For example, the motion amount may be obtained by calculating a mean variation value for each image block which includes a plurality of pixels. Alternatively, the motion amount may be obtained with a method called pattern matching in which the signal levels are matched to those of a template.

(4) The distribution pattern of the luminance weights to the 19 subfields shown in Embodiments 2 and 3 may be varied in many ways. For example, the luminance weights may be assigned as 23, 22, 21, 20, 19, 18, 17, 16, 15, 14, 13, 12, 11, 11, 10, 6, 4, 2, and 1. Furthermore, the subfields with these luminance weights may be divided into a first subfield group and a second subfield group, where the first subfield group is an initial part of the TV field composed of successive 14 subfields (having luminance weights 23, 22, 21, 20, 19, 18, 17, 16, 15, 14, 13, 12, 11, 11), and the second subfield group being

composed of the rest of the subfields. Alternatively, one TV field may include a total of 15 subfields, and the luminance weights may be assigned as 24, 24, 24, 24, 24, 24, 24, 24, 24, 16, 10, 6, 4, 2, and 1. The subfields with these luminance weights may be divided into a first subfield group composed of successive first 10 subfields (having luminance weights 24 and 16) and a second subfield group composed of the rest of the subfields.

For the present cases, as described in the embodiments, it is also possible to set the total luminance weight value of the second subfield group not to exceed the maximum luminance weight of the first subfield group and so that the luminance weights of the second subfield group, by combination, cover the luminance weights not included in the first subfield group.

Also, by performing the initialization a certain times less than the number of subfields for each TV field, an effect of suppressing the occurrence of the moving image false edge is generated since the display period increases by this.

Also, the number of subfields in the second subfield group may be increased and the number of initializations may be reduced so that the image quality for low luminance is improved.

(5) In Embodiments 1, 2, and 3, each input analog image is subjected to the  $\gamma$  inverted correction process, and after this process, each signal is subjected to the A/D conversion process. However, the order of these performances may be reversed.

(6) Use of the image evaluation apparatus shown in Embodiment 4 provides an excellent guidance to the design of image display apparatuses represented by PDP, helping the designer determine the number of subfields and the luminance weights. Image display apparatuses designed in this way display images with reduced occurrences of moving image false edges.

Furthermore, the image evaluation feature of the present image evaluation apparatus may be achieved by a program. Such a program may be recorded in floppy disks, IC cards, ROM cassettes and the like and may be carried or transported to be run on an independent computer system.

(7) The techniques disclosed in Embodiments 1 to 4 of the present description may be applied to DMD (Digital Micromirror Device) in a similar manner.

The present invention has been fully described by way of examples with reference to the accompanying drawings, it is to be noted that various changes and modifications will be apparent to those skilled in the art. Therefore, unless such changes and modifications depart from the scope of the present invention, they should be construed as being included therein.

## Claims

1. An image display apparatus which displays a multi-gray-scale image, where the multi-gray-scale image is displayed in a time unit called TV field which is divided into N subfields which are respectively assigned luminance weights, and the multi-gray-scale image is expressed by illuminating desired subfields, the image display apparatus comprising:

a selecting means for selecting a gray scale level among a plurality of gray scale levels in accordance with a motion amount of an input image signal, wherein the luminance weights are represented as  $W_1, W_2, \dots$  and  $W_N$ , each of the plurality of gray scale levels is expressed by an arbitrary combination of 0,  $W_1, W_2, \dots$  and  $W_N$ , and the motion amount is a change of the input image signal over time; and  
a subfield illuminating means for illuminating subfields corresponding to the selected gray scale level.

2. The image display apparatus of Claim 1, wherein

the selecting means includes:  
a first selecting means which selects a group of gray scale levels so that possibility of occurrence of a moving image false edge decreases as the motion amount increases; and  
a second selecting means for selecting a gray scale level among the selected group of gray scale levels in accordance with a gray scale level of the input image signal.

3. The image display apparatus of Claim 2, wherein the first selecting means selects a group of gray scale levels so that the number of gray scale levels takes higher priority as the motion amount decreases.

4. The image display apparatus of Claim 2, wherein the first selecting means selects a group of (N+1) gray scale levels which are 0,  $W_1, W_1+W_2, W_1+W_2+W_3, \dots, W_1+W_2+W_3+\dots+W_N$  when the motion amount is at its maximum, wherein  $W_1 \leq W_2 \leq \dots \leq W_N$ .

5. The image display apparatus of Claim 1, wherein

the selecting means includes:  
a table showing correspondence between motion amounts and combinations of gray scale levels in order between which a predetermined number of gray scale levels are skipped, wherein in the table, as the motion amount increases, the predetermined number of skipped gray scale levels increases; and

a detecting unit for detecting a combination of gray scale levels corresponding to a given motion amount from the table, wherein the selecting means selects a gray scale level, in accordance with a gray scale level of the input image signal, among the combination of gray scale levels detected by the detecting unit.

6. The image display apparatus of Claim 5, wherein in the table, a maximum motion amount corresponds to a combination of gray scale levels which each are composed of one subfield and subfields included in a gray scale level which is smaller than a present gray scale level by one level.

7. The image display apparatus of Claim 5, wherein in the table, motion amounts ranging from an approximately intermediate amount to small amounts correspond to combinations of gray scale levels which each include a sequence of a non-illumination subfield and an illumination subfield, wherein subfields are arranged in proportionate to largeness of luminance weights, and the sequence is assigned smaller luminance weights as the motion amount increases.

8. The image display apparatus of Claim 1 further comprising:

a motion amount detecting means which obtains a difference between gray scale levels for a same pixel position in a present frame and a preceding frame and detects a motion amount when the difference exceeds a predetermined value and otherwise detects motion amount "0."

9. The image display apparatus of Claim 8, wherein

the selecting means includes:

a table which shows a combination of gray scale levels corresponding to the motion amount detected by the motion amount detecting means and shows a combination of all gray scale levels for the input image signal corresponding to the motion amount "0," wherein the combinations of gray scale levels corresponding to the motion amount is arranged in order with a predetermined number of gray scale levels being skipped, and

a detecting unit for detecting a combination of gray scale levels from the table in accordance with a motion amount detected by the motion amount detecting means, wherein the selecting means selects a gray scale level, in accordance with a gray scale level of the input image signal, among the combination of gray scale levels detected by the detecting unit.

10. The image display apparatus of Claim 9, wherein

in the table, each gray scale level included in the combination of gray scale levels corresponding to the motion amount is composed of one subfield and subfields included in a gray scale level which is smaller than a present gray scale level by one level.

11. The image display apparatus of Claim 8, wherein

the motion amount detecting means includes: a preliminary motion amount detecting unit which obtains a difference between gray scale levels for a same pixel position in a present frame and a preceding frame and detects one of a motion amount and motion amount "0" based on the difference; a slant block detecting unit for detecting a slant block in which gray scale levels change monotonously over successive pixel positions; and a motion amount correcting unit for correcting, based on a result of the slant block detecting unit, the motion amount detected by the preliminary motion amount detecting unit.

12. The image display apparatus of Claim 11, wherein

the selecting means includes:

a table showing correspondence between motion amounts including motion amount "0" and combinations of gray scale levels in order between which a predetermined number of gray scale levels are skipped, wherein the motion amount "0" corresponds to a combination of all gray scale levels for the input image signal; and a detecting unit for detecting a combination of gray scale levels from the table in accordance with a judgement by the motion amount detecting means, wherein

the selecting means selects a gray scale level, in accordance with a gray scale level of the input image signal, among the combination of gray scale levels detected by the detecting unit.

13. The image display apparatus of Claim 12, wherein in the table, each motion amount except motion amount "0" corresponds to a combination of gray scale levels which each are composed of one subfield and subfields included in a gray scale level which is smaller than a present gray scale level by one level.

14. The image display apparatus of Claim 1 further comprising:

a motion amount detecting means which obtains a difference between gray scale levels for a same pixel position in a present frame and a preceding frame and detects a motion amount when the difference exceeds a predetermined value and



further detects, in accordance with the difference, one out of two or more graded motion amounts, and otherwise detects motion amount "0."

15. The image display apparatus of Claim 14, wherein

the selecting means includes:

a table showing correspondence between motion amounts including motion amount "0" and combinations of gray scale levels in order between which a predetermined number of gray scale levels are skipped, wherein the motion amount "0" corresponds to a combination of all gray scale levels for the input image signal, wherein in the table, as the motion amount increases, the predetermined number of skipped gray scale levels increases; and a detecting unit for detecting a combination of gray scale levels from the table in accordance with a judgement by the motion amount detecting means, wherein

the selecting means selects a gray scale level, in accordance with a gray scale level of the input image signal, among the combination of gray scale levels detected by the detecting unit.

16. The image display apparatus of Claim 15, wherein in the table, the maximum motion amount corresponds to a combination of gray scale levels which each are composed of one subfield and subfields included in a gray scale level which is smaller than a present gray scale level by one level.

17. The image display apparatus of Claim 14, wherein

the motion amount detecting means includes: a preliminary motion amount detecting means which obtains a difference between gray scale levels for a same pixel position in a present frame and a preceding frame and detects, in accordance with the difference, a motion amount out of two or more graded motion amounts; a slant block detecting unit for detecting a slant block in which gray scale levels change monotonously over successive pixel positions; and a motion amount correcting unit for correcting, based on a result of the slant block detecting unit, the motion amount detected by the preliminary motion amount detecting unit.

18. The image display apparatus of Claim 17, wherein

the selecting means includes:

a table showing correspondence between motion amounts including motion amount "0" and combinations of gray scale levels in order between which a predetermined number of gray scale levels are skipped, wherein the motion

amount "0" corresponds to a combination of all gray scale levels for the input image signal, wherein in the table, as the motion amount increases, the predetermined number of skipped gray scale levels increases; and a detecting unit for detecting a combination of gray scale levels from the table in accordance with a judgement by the motion amount detecting means, wherein the selecting means selects a gray scale level, in accordance with a gray scale level of the input image signal, among the combination of gray scale levels detected by the detecting unit.

19. The image display apparatus of Claim 18, wherein in the table, the maximum motion amount corresponds to a combination of gray scale levels which each are composed of one subfield and subfields included in a gray scale level which is smaller than a present gray scale level by one level.

20. The image display apparatus of Claim 1 further comprising:

an error diffusion means which detects, for a pixel, a difference between a gray scale level of the input image signal and a gray scale level to be displayed and distributes the difference to pixels surrounding the pixel.

21. The image display apparatus of Claim 20, wherein

an error calculating unit which calculates the difference between the gray scale level of the input image signal and the gray scale level to be displayed;

a delay unit for delaying the input image signal; a coefficient unit for determining, based on the difference calculated by the error calculating unit, gray scale levels to be distributed to the surrounding pixels; and

an addition unit for adding the gray scale levels to be distributed to the surrounding pixels to the input image signals.

22. The image display apparatus of Claim 1 further comprising:

a filter means which suppresses components that change radically over time among high-frequency components in spatial frequencies of the input image signal, wherein each output of the filter means is input to the selecting means.

23. The image display apparatus of Claim 22, wherein

the filter means includes:

a two-dimensional high pass filter;

a two-dimensional low pass filter;  
 a time response low pass filter; and  
 an addition unit, wherein  
 the input image signal is supplied to the two-dimensional high pass filter and the two-dimensional low pass filter,  
 an output of the two-dimensional high pass filter is transmitted to the time response low pass filter, and  
 the addition unit adds an output of the time response low pass filter to an output of the two-dimensional low pass filter.

24. The image display apparatus of Claim 22, wherein

the filter means includes:  
 a time response high pass filter;  
 a time response low pass filter;  
 a two-dimensional low pass filter; and  
 an addition unit, wherein  
 the time response high pass filter receives the input image signal and outputs only components of the input image signal that change radically over time,  
 the two-dimensional low pass filter suppresses high-frequency components in spatial frequencies of the output components that change radically over time, and  
 the addition unit adds an output of the time response low pass filter to an output of the two-dimensional low pass filter.

25. An image display apparatus which displays a multi-gray-scale image, where the multi-gray-scale image is displayed in a time unit called TV field which is divided into a plurality of subfields which are respectively assigned luminance weights, and the multi-gray-scale image is expressed by illuminating desired subfields, the image display apparatus comprising:

a converting means for converting an input image signal into subfield information for each pixel, the subfield information showing a state of each subfield, the state being either of ON and OFF which respectively correspond to illumination and non-illumination;  
 a display having a display screen which is composed of a plurality of pixels being illumination cells;  
 a display control means which controls illumination of the illumination cells by sequentially reading the subfield information in units of TV fields and by illuminating the illumination cells in accordance with the read subfield information, and  
 prior to the illumination of the illumination cells, initializes the plurality of pixels and performs an

addressing of pixels to be illuminated, wherein the display control means initializes the plurality of pixels before each subfield and performs the initialization (the number of subfields - 1) times for each TV field, wherein the converting means stores information showing correspondence between each possible level of the input image signal and a piece of subfield information, wherein in the information stored in the converting means, input signal levels in a predetermined range correspond to pieces of subfield information which show illumination subfields extend either of forward and backward over time.

26. The image display apparatus of Claim 25, wherein

the converting means includes:  
 a table showing correspondence between each possible level of the input image signal and a piece of subfield information.

27. The image display apparatus of Claim 25, wherein

a total number of subfields in one TV field is N, and each TV field includes:  
 a first subfield group being composed of successive M subfields to which one of same relatively large luminance weights and slightly and gradually changing relatively large luminance weights are assigned; and  
 a second subfield group being composed of other (N-M) subfields, wherein the display control means initializes the plurality of pixels before each subfield in the first subfield group and performs the initialization (M - 1) times or less for each TV field.

28. The image display apparatus of Claim 27, wherein each luminance weight assigned to each subfield in the first subfield group is equal to or less than a total luminance weight assigned to the second subfield group.

29. The image display apparatus of Claim 27, wherein

the first subfield group is arranged at an initial part of each TV field and the second subfield group follows the first subfield group, and the display control means initializes the plurality of pixels once before a first subfield of the first subfield group and in this initialization, electric charges stored in each illumination cell are removed and then an addressing is performed in which electric charges are formed in illumination cells to be illuminated.

30. The image display apparatus of Claim 27, wherein

the first subfield group is arranged at a last part of each TV field and the second subfield group precedes the first subfield group, and the display control means initializes the plurality of pixels once before a first subfield of the first subfield group and in this initialization, electric charges are formed in illumination cells to be illuminated and then an addressing is performed in which electric charges stored in non-illumination cells are removed.

31. The image display apparatus of Claim 29, wherein

the display control means includes:  
a first addressing unit for performing an addressing to a part of the plurality of pixels of the display screen; and  
a second addressing unit for performing an addressing to the rest of the plurality of pixels in parallel to the addressing performed by the first addressing unit.

32. The image display apparatus of Claim 30, wherein

the display control means includes:  
a first addressing unit for performing an addressing to a part of the plurality of pixels of the display screen; and  
a second addressing unit for performing an addressing to the rest of the plurality of pixels in parallel to the addressing performed by the first addressing unit.

33. The image display apparatus of Claim 31, wherein

256 gray scale levels are used in total, and one of following conditions (1), (2), and (3) is satisfied:

(1) each TV field is divided into 19 subfields, and luminance weights assigned to the 19 subfields are 16, 16, 16, 16, 16, 16, 16, 16, 16, 16, 16, 16, 16, 8, 4, 2, and 1 in time order;

(2) each TV field is divided into 19 subfields, and luminance weights assigned to the 19 subfields are 23, 22, 21, 20, 19, 18, 17, 16, 15, 14, 13, 12, 11, 11, 10, 6, 4, 2, and 1 in time order; and

(3) each TV field is divided into 15 subfields, and luminance weights assigned to the 15 subfields are 24, 24, 24, 24, 24, 24, 24, 24, 24, 16, 10, 6, 4, 2, and 1 in time order.

34. The image display apparatus of Claim 32, wherein

256 gray scale levels are used in total, and

one of following conditions (1), (2), and (3) is satisfied:

(1) each TV field is divided into 19 subfields, and luminance weights assigned to the 19 subfields are 16, 16, 16, 16, 16, 16, 16, 16, 16, 16, 16, 16, 16, 8, 4, 2, and 1 in time order;

(2) each TV field is divided into 19 subfields, and luminance weights assigned to the 19 subfields are 23, 22, 21, 20, 19, 18, 17, 16, 15, 14, 13, 12, 11, 11, 10, 6, 4, 2, and 1 in time order; and

(3) each TV field is divided into 15 subfields, and luminance weights assigned to the 15 subfields are 24, 24, 24, 24, 24, 24, 24, 24, 24, 16, 10, 6, 4, 2, and 1 in time order.

35. The image display apparatus of Claim 25 further comprising:

a filter means which suppresses components that change radically over time among high-frequency components in spatial frequencies of the input image signal, wherein each output of the filter means is input to the selecting means.

36. The image display apparatus of Claim 35, wherein

the filter means includes:

a two-dimensional high pass filter;

a two-dimensional low pass filter;

a time response low pass filter; and

an addition unit, wherein

the input image signal is supplied to the two-dimensional high pass filter and the two-dimensional low pass filter,

an output of the two-dimensional high pass filter is transmitted to the time response low pass filter, and

the addition unit adds an output of the time response low pass filter to an output of the two-dimensional low pass filter.

37. The image display apparatus of Claim 35, wherein

the filter means includes:

a time response high pass filter;

a time response low pass filter;

a two-dimensional low pass filter; and

an addition unit, wherein

the time response high pass filter receives the input image signal and outputs only components of the input image signal that change radically over time,

the two-dimensional low pass filter suppresses

high-frequency components in spatial frequencies of the output components that change radically over time, and the addition unit adds an output of the time response low pass filter to an output of the two-dimensional low pass filter.

38. An image evaluation apparatus which evaluates moving images displayed on an image display apparatus which expresses gray scale of the moving images by illumination modulated over time, the image evaluation apparatus comprising:

a subfield ON/OFF information generating means which, having an information source which includes information concerning subfields which are defined in the image display apparatus, receives an input image signal and converts the input image signal into subfield ON/OFF information by referring to the information source for each pixel, the subfield ON/OFF information showing a state of each subfield, the state being either of ON and OFF which respectively correspond to illumination and non-illumination;

a standard point setting means which sets a standard point to a pixel on a virtual image which is virtually displayed based on the subfield ON/OFF information;

a course calculating means for calculating a course which is formed by a movement from the standard point to a point in a unit time, the calculation being performed in accordance with a motion vector input in relation to the input image signal;

an illumination amount calculating means for, in accordance with the subfield ON/OFF information, calculating illumination amounts of pixels which neighbor the course calculated by the course calculating means;

a illumination amount totaling means which adds up the illumination amounts calculated by the illumination amount calculating means and outputs a total illumination amount; and

an evaluation means for generating evaluation information from the total illumination amount output by the illumination amount totaling means, the evaluation information showing a state of an image displayed on the image display apparatus.

39. The image evaluation apparatus of Claim 38 further comprising:

a repeating means which controls the standard point setting means, the course calculating means, the illumination amount calculating means, the illumination amount totaling means, and the evaluation means to process other standard points

similarly.

40. The image evaluation apparatus of Claim 38, wherein

the illumination amount calculating means includes:

a weighting means for calculating illumination amounts of pixels which neighbor the course calculated by the course calculating means and assigning predetermined weights to the calculated illumination amounts respectively; and an addition means for adding values to the calculated illumination amounts in proportionate to the assigned weights.

41. The image evaluation apparatus of Claim 40, wherein

the weighting means includes:

an evaluation area setting means for setting an evaluation area on the course calculated by the course calculating means, the evaluation area having an area being equal to or larger than an area of one pixel; and

an area ratio calculating means for calculating ratios of areas of pixels which are included in the evaluation area to the area of the evaluation area, wherein

the ratios calculated by the area ratio calculating means are used as the predetermined weights.

42. The image evaluation apparatus of Claim 41, wherein

the evaluation area set by the evaluation area setting means on the course has an area equal to the area of one pixel.

43. An image display apparatus comprising:

a filter means which suppresses components that change radically over time among high-frequency components in spatial frequencies of the input image signal; and a display.

44. The image display apparatus of Claim 43, wherein

the filter means includes:

a two-dimensional high pass filter; a two-dimensional low pass filter; a time response low pass filter; and an addition unit, wherein

the input image signal is supplied to the two-dimensional high pass filter and the two-dimensional low pass filter, an output of the two-dimensional high pass fil-

ter is transmitted to the time response low pass filter,

the addition unit adds an output of the time response low pass filter to an output of the two-dimensional low pass filter and outputs a signal, and

the display displays the signal output from the addition unit.

45. The image display apparatus of Claim 43, wherein

the filter means includes:

a time response high pass filter;

a time response low pass filter;

a two-dimensional low pass filter; and

an addition unit; wherein

the time response high pass filter receives the input image signal and outputs only components of the input image signal that change radically over time,

the two-dimensional low pass filter suppresses high-frequency components in spatial frequencies of the output components that change radically over time, and

the addition unit adds an output of the time response low pass filter to an output of the two-dimensional low pass filter and outputs a signal, and

the display displays the signal output from the addition unit.

46. A recording medium storing a program used to evaluate moving images displayed on an image display apparatus which expresses gray scale of the moving images by illumination modulated over time, the program comprising:

a subfield ON/OFF information generating step for receiving an input image signal and converting the input image signal into subfield ON/OFF information by referring to an information source for each pixel, the subfield ON/OFF information showing a state of each subfield, the state being either of ON and OFF which respectively correspond to illumination and non-illumination, the information source being stored in a storage area and including information concerning subfields which are defined in the image display apparatus;

a standard point setting step for setting a standard point to a pixel on a virtual image which is virtually displayed based on the subfield ON/OFF information;

a course calculating step for calculating a course which is formed by a movement from the standard point to a point in a unit time, the calculation being performed in accordance with a motion vector input in relation to the input im-

age signal;

an illumination amount calculating step for, in accordance with the subfield ON/OFF information, calculating illumination amounts of pixels which neighbor the course calculated in the course calculating step;

a illumination amount totaling step for adding up the illumination amounts calculated in the illumination amount calculating step and outputting a total illumination amount; and

an evaluation step for generating evaluation information from the total illumination amount output in the illumination amount totaling step, the evaluation information showing a state of an image displayed on the image display apparatus.

47. An image display apparatus which is produced based on the number of subfields and luminance weights assigned to the subfields, wherein the number of subfields and the luminance weights are determined by running the program stored in the recording medium defined in Claim 46 on a computer system and are determined so that evaluation values for images to be displayed on the image display apparatus are improved.

48. A production method of the image display apparatus defined in Claim 47.

FIG. 1

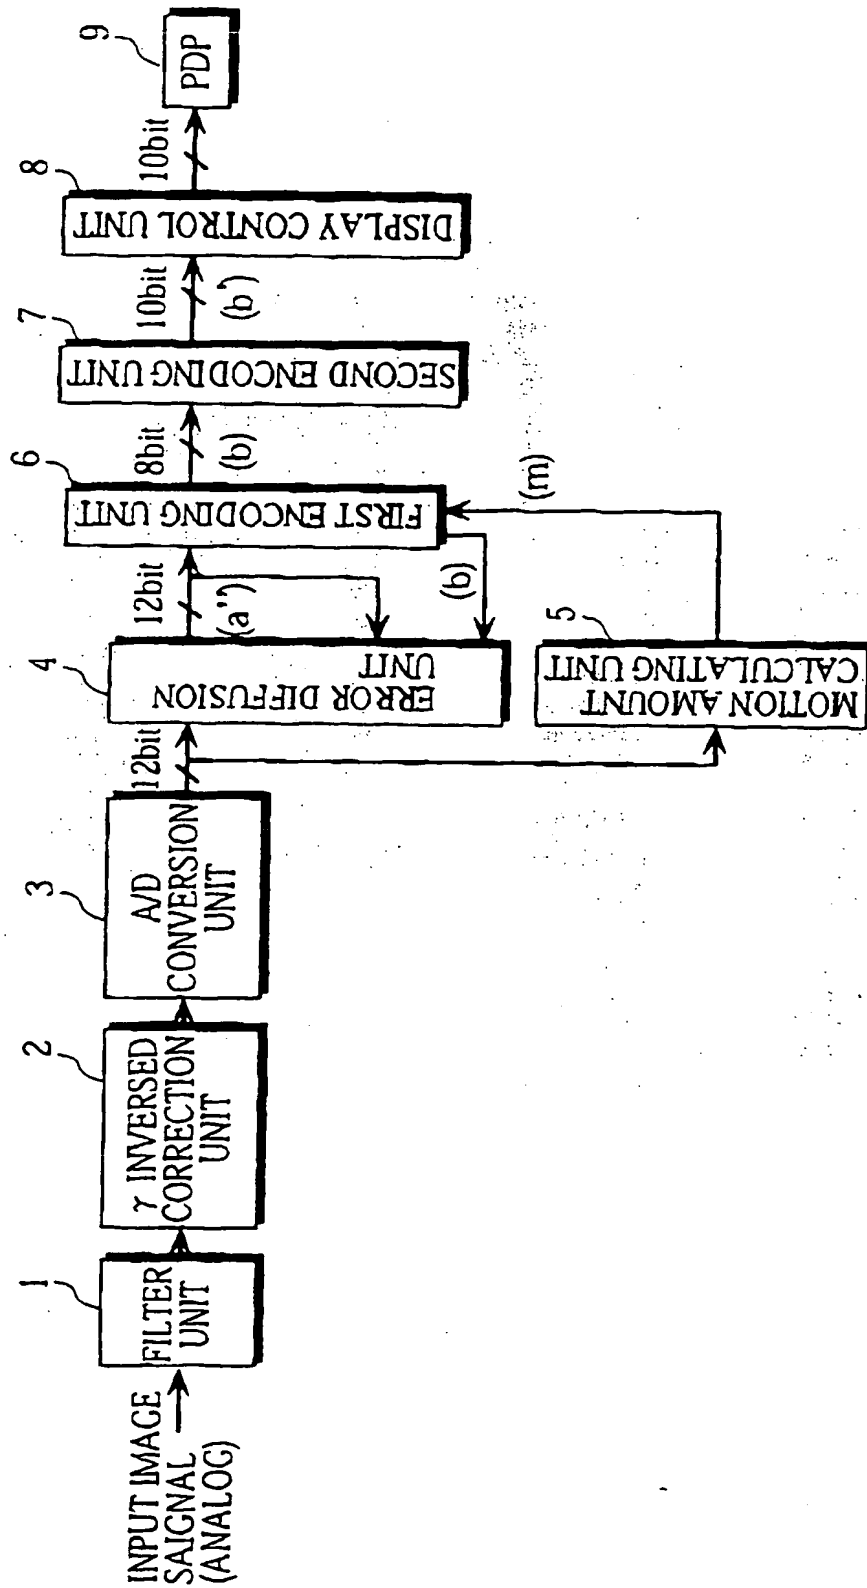


FIG. 2

## SECOND ENCODING UNIT 7

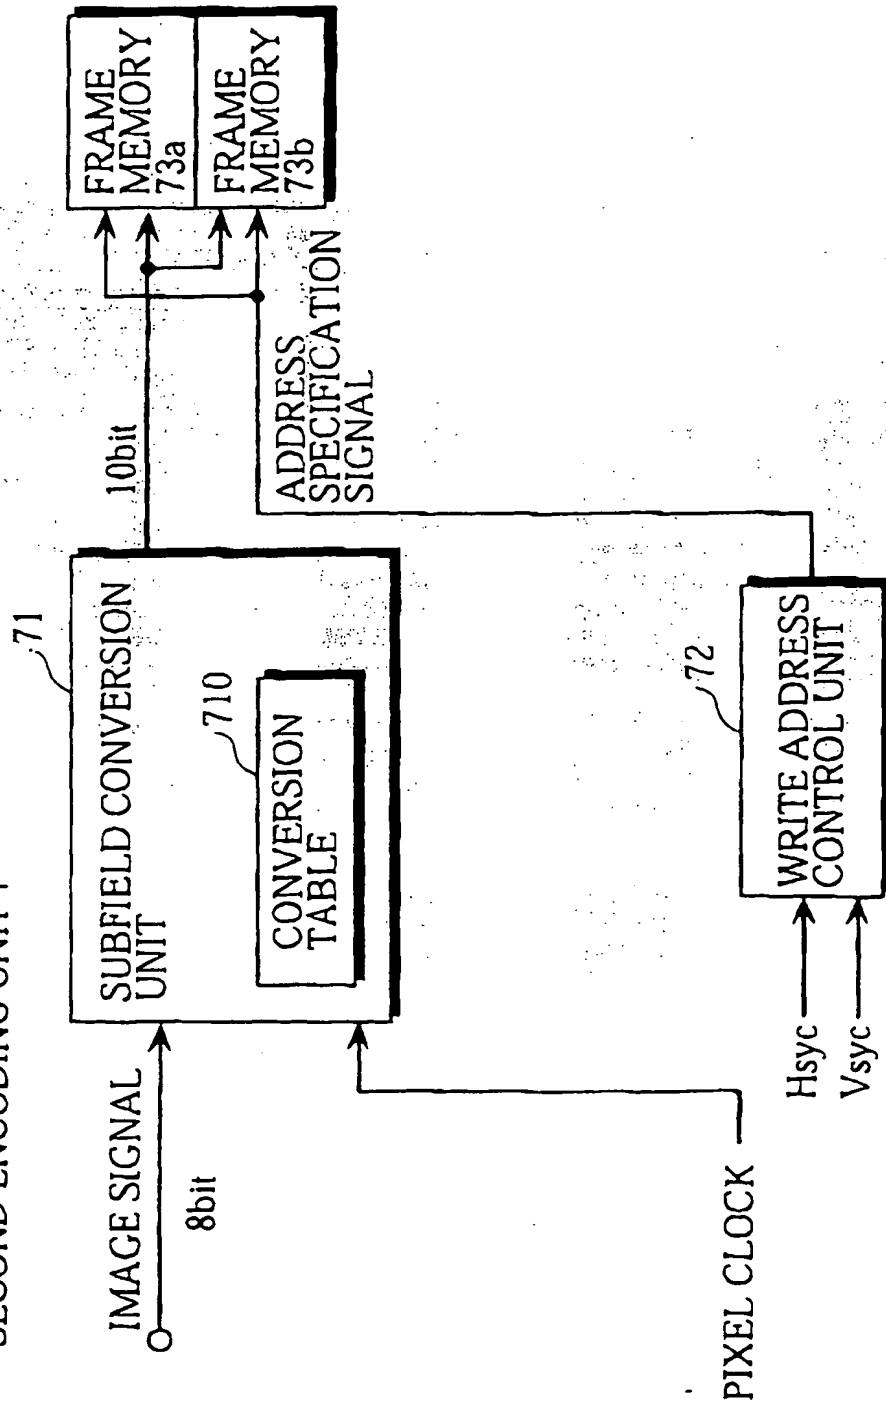


FIG. 3(a)

(a)	WEIGHTS FOR SUBFIELD S										(b)
	1	2	3	4	5	6	7	8	9	10	
INPUT LEVEL	1	2	4	7	13	23	33	43	56	74	CONVERSION OUTPUT
0											0
1											1
2											2
3											3
4											4
5											5
6											6
7											7
8											8
9											9
10											10
11											11
12											12
13											13
14											14
15											15
16											16
17											17
18											18
19											19
20											20
21											21
22											22
23											23
24											24
25											25
26											26
27											27
28											28
29											29
30											30
31											31
32											32
33											33
34											34
35											35
36											36
37											37
38											38
39											39
40											40
41											41
42											42
43											43
44											44
45											45
46											46
47											47
48											48
49											49
50											50
51											51
52											52
53											53
54											54
55											55
56											56
57											57
58											58
59											59
60											60
61											61
62											62
63											63
64											64
65											65
66											66
67											67
68											68

FIG. 3(b)

(a)	(b)	USABLE ENCODED OUTPUT (b)									
		MOTION AMOUNT (m)									
INPUT LEVEL	CONVERSION OUTPUT	9	8	7	6	5	4	3	2	1	0
0	0										
1	1										
2	2										
3	3										
4	4										
5	5										
6	6										
7	7										
8	8										
9	9										
10	10										
11	11										
12	12										
13	13										
14	14										
15	15										
16	16										
17	17										
18	18										
19	19										
20	20										
21	21										
22	22										
23	23										
24	24										
25	25										
26	26										
27	27										
28	28										
29	29										
30	30										
31	31										
32	32										
33	33										
34	34										
35	35										
36	36										
37	37										
38	38										
39	39										
40	40										
41	41										
42	42										
43	43										
44	44										
45	45										
46	46										
47	47										
48	48										
49	49										
50	50										
51	51										
52	52										
53	53										
54	54										
55	55										
56	56										
57	57										
58	58										
59	59										
60	60										
61	61										
62	62										
63	63										
64	64										
65	65										
66	66										
67	67										
68	68										



FIG. 4(a)

(a)	WEIGHTS FOR SUBFIELDS										(b)
	1	2	3	4	5	6	7	8	9	10	
INPUT LEVEL	1	2	3	4	5	6	7	8	9	10	CONVERSION OUTPUT
69											110
70											111
71											114
72											115
73											116
74											117
75											118
76											119
77											121
78											122
79											123
80											124
81											125
82											126
83											127
84											181
85											182
86											183
87											185
88											186
89											187
90											188
91											189
92											190
93											191
94											213
95											214
96											215
97											217
98											218
99											219
100											220
101											221
102											222
103											223
104											229
105											230
106											231
107											233
108											234
109											235
110											236
111											237
112											238
113											239
114											242
115											243
116											244
117											245
118											246
119											247
120											249
121											250
122											251
123											252
124											253
125											254
126											255
127											371
128											372
129											373
130											374
131											375
132											377
133											378
134											379
135											380
136											381
137											382
138											383

FIG. 4(b)

(a)	(b)	USABLE ENCODED OUTPUT (b)									
		MOTION AMOUNT (m)									
INPUT LEVEL	CONVERSION OUTPUT	9	8	7	6	5	4	3	2	1	0
69	110										
70	111										
71	114										
72	115										
73	116										
74	117										
75	118										
76	119										
77	121										
78	122										
79	123										
80	124										
81	125										
82	126										
83	127										
84	181										
85	182										
86	183										
87	185										
88	186										
89	187										
90	188										
91	189										
92	190										
93	191										
94	213										
95	214										
96	215										
97	217										
98	218										
99	219										
100	220										
101	221										
102	222										
103	223										
104	229										
105	230										
106	231										
107	233										
108	234										
109	235										
110	236										
111	237										
112	238										
113	239										
114	242										
115	243										
116	244										
117	245										
118	246										
119	247										
120	249										
121	250										
122	251										
123	252										
124	253										
125	254										
126	255										
127	371										
128	372										
129	373										
130	374										
131	375										
132	377										
133	378										
134	379										
135	380										
136	381										
137	382										
138	383										

FIG. 5(a)

(a)	WEIGHTS FOR SUBFIELDS										(b)
	1	2	3	4	5	6	7	8	9	10	
INPUT LEVEL	1	2	3	4	5	6	7	8	9	10	CONVERSION OUTPUT
139	1	1	1	1	1	1	1	1	1	1	437
140	1	1	1	1	1	1	1	1	1	1	438
141	1	1	1	1	1	1	1	1	1	1	439
142	1	1	1	1	1	1	1	1	1	1	441
143	1	1	1	1	1	1	1	1	1	1	442
144	1	1	1	1	1	1	1	1	1	1	443
145	1	1	1	1	1	1	1	1	1	1	444
146	1	1	1	1	1	1	1	1	1	1	445
147	1	1	1	1	1	1	1	1	1	1	446
148	1	1	1	1	1	1	1	1	1	1	447
149	1	1	1	1	1	1	1	1	1	1	469
150	1	1	1	1	1	1	1	1	1	1	470
151	1	1	1	1	1	1	1	1	1	1	471
152	1	1	1	1	1	1	1	1	1	1	473
153	1	1	1	1	1	1	1	1	1	1	474
154	1	1	1	1	1	1	1	1	1	1	475
155	1	1	1	1	1	1	1	1	1	1	476
156	1	1	1	1	1	1	1	1	1	1	477
157	1	1	1	1	1	1	1	1	1	1	478
158	1	1	1	1	1	1	1	1	1	1	479
159	1	1	1	1	1	1	1	1	1	1	485
160	1	1	1	1	1	1	1	1	1	1	486
161	1	1	1	1	1	1	1	1	1	1	487
162	1	1	1	1	1	1	1	1	1	1	489
163	1	1	1	1	1	1	1	1	1	1	490
164	1	1	1	1	1	1	1	1	1	1	491
165	1	1	1	1	1	1	1	1	1	1	492
166	1	1	1	1	1	1	1	1	1	1	493
167	1	1	1	1	1	1	1	1	1	1	494
168	1	1	1	1	1	1	1	1	1	1	495
169	1	1	1	1	1	1	1	1	1	1	498
170	1	1	1	1	1	1	1	1	1	1	499
171	1	1	1	1	1	1	1	1	1	1	500
172	1	1	1	1	1	1	1	1	1	1	501
173	1	1	1	1	1	1	1	1	1	1	502
174	1	1	1	1	1	1	1	1	1	1	503
175	1	1	1	1	1	1	1	1	1	1	505
176	1	1	1	1	1	1	1	1	1	1	506
177	1	1	1	1	1	1	1	1	1	1	507
178	1	1	1	1	1	1	1	1	1	1	508
179	1	1	1	1	1	1	1	1	1	1	509
180	1	1	1	1	1	1	1	1	1	1	510
181	1	1	1	1	1	1	1	1	1	1	511
182	1	1	1	1	1	1	1	1	1	1	746
183	1	1	1	1	1	1	1	1	1	1	747
184	1	1	1	1	1	1	1	1	1	1	748
185	1	1	1	1	1	1	1	1	1	1	749
186	1	1	1	1	1	1	1	1	1	1	750
187	1	1	1	1	1	1	1	1	1	1	751
188	1	1	1	1	1	1	1	1	1	1	754
189	1	1	1	1	1	1	1	1	1	1	755
190	1	1	1	1	1	1	1	1	1	1	756
191	1	1	1	1	1	1	1	1	1	1	757
192	1	1	1	1	1	1	1	1	1	1	758
193	1	1	1	1	1	1	1	1	1	1	759
194	1	1	1	1	1	1	1	1	1	1	761
195	1	1	1	1	1	1	1	1	1	1	762
196	1	1	1	1	1	1	1	1	1	1	763
197	1	1	1	1	1	1	1	1	1	1	764
198	1	1	1	1	1	1	1	1	1	1	765
199	1	1	1	1	1	1	1	1	1	1	766
200	1	1	1	1	1	1	1	1	1	1	767
201	1	1	1	1	1	1	1	1	1	1	883
202	1	1	1	1	1	1	1	1	1	1	884
203	1	1	1	1	1	1	1	1	1	1	885
204	1	1	1	1	1	1	1	1	1	1	886
205	1	1	1	1	1	1	1	1	1	1	887
206	1	1	1	1	1	1	1	1	1	1	889
207	1	1	1	1	1	1	1	1	1	1	890
208	1	1	1	1	1	1	1	1	1	1	891

FIG. 5(b)


(a)	(b)	USER ENCODED OUTPUT (b)									
		MOTION AMOUNT (m)									
INPUT LEVEL	CONVERSION OUTPUT	9	8	7	6	5	4	3	2	1	0
139	437										
140	438										
141	439										
142	441										
143	442										
144	443										
145	444										
146	445										
147	446										
148	447										
149	469										
150	470										
151	471										
152	473										
153	474										
154	475										
155	476										
156	477										
157	478										
158	479										
159	485										
160	486										
161	487										
162	489										
163	490										
164	491										
165	492										
166	493										
167	494										
168	495										
169	498										
170	499										
171	500										
172	501										
173	502										
174	503										
175	505										
176	506										
177	507										
178	508										
179	509										
180	510										
181	511										
182	746										
183	747										
184	748										
185	749										
186	750										
187	751										
188	754										
189	755										
190	756										
191	757										
192	758										
193	759										
194	761										
195	762										
196	763										
197	764										
198	765										
199	766										
200	767										
201	883										
202	884										
203	885										
204	886										
205	887										
206	889										
207	890										
208	891										

FIG. 6(a)

(a)	WEIGHTS FOR SUBFIELDS								(b)
	1	2	3	4	5	6	7	8	
INPUT LEVEL	1	2	3	4	5	6	7	8	CONVERSION OUTPUT
209									892
210									893
211									894
212									895
213									949
214									950
215									951
216									953
217									954
218									955
219									956
220									957
221									958
222									959
223									981
224									982
225									983
226									985
227									986
228									987
229									988
230									989
231									990
232									991
233									997
234									998
235									999
236									1001
237									1002
238									1003
239									1004
240									1005
241									1006
242									1007
243									1010
244									1011
245									1012
246									1013
247									1014
248									1015
249									1017
250									1018
251									1019
252									1020
253									1021
254									1022
255									1023

FIG. 6(b)

(a)	(b)	USABLE ENCODED OUTPUT							
		MOTION AMOUNT (m)							
INPUT LEVEL	CONVERSION OUTPUT	9	8	7	6	5	4	3	2
209	892								
210	893								
211	894								
212	895								
213	949								
214	950								
215	951								
216	953								
217	954								
218	955								
219	956								
220	957								
221	958								
222	959								
223	981								
224	982								
225	983								
226	985								
227	986								
228	987								
229	988								
230	989								
231	990								
232	991								
233	997								
234	998								
235	999								
236	1001								
237	1002								
238	1003								
239	1004								
240	1005								
241	1006								
242	1007								
243	1010								
244	1011								
245	1012								
246	1013								
247	1014								
248	1015								
249	1017								
250	1018								
251	1019								
252	1020								
253	1021								
254	1022								
255	1023								

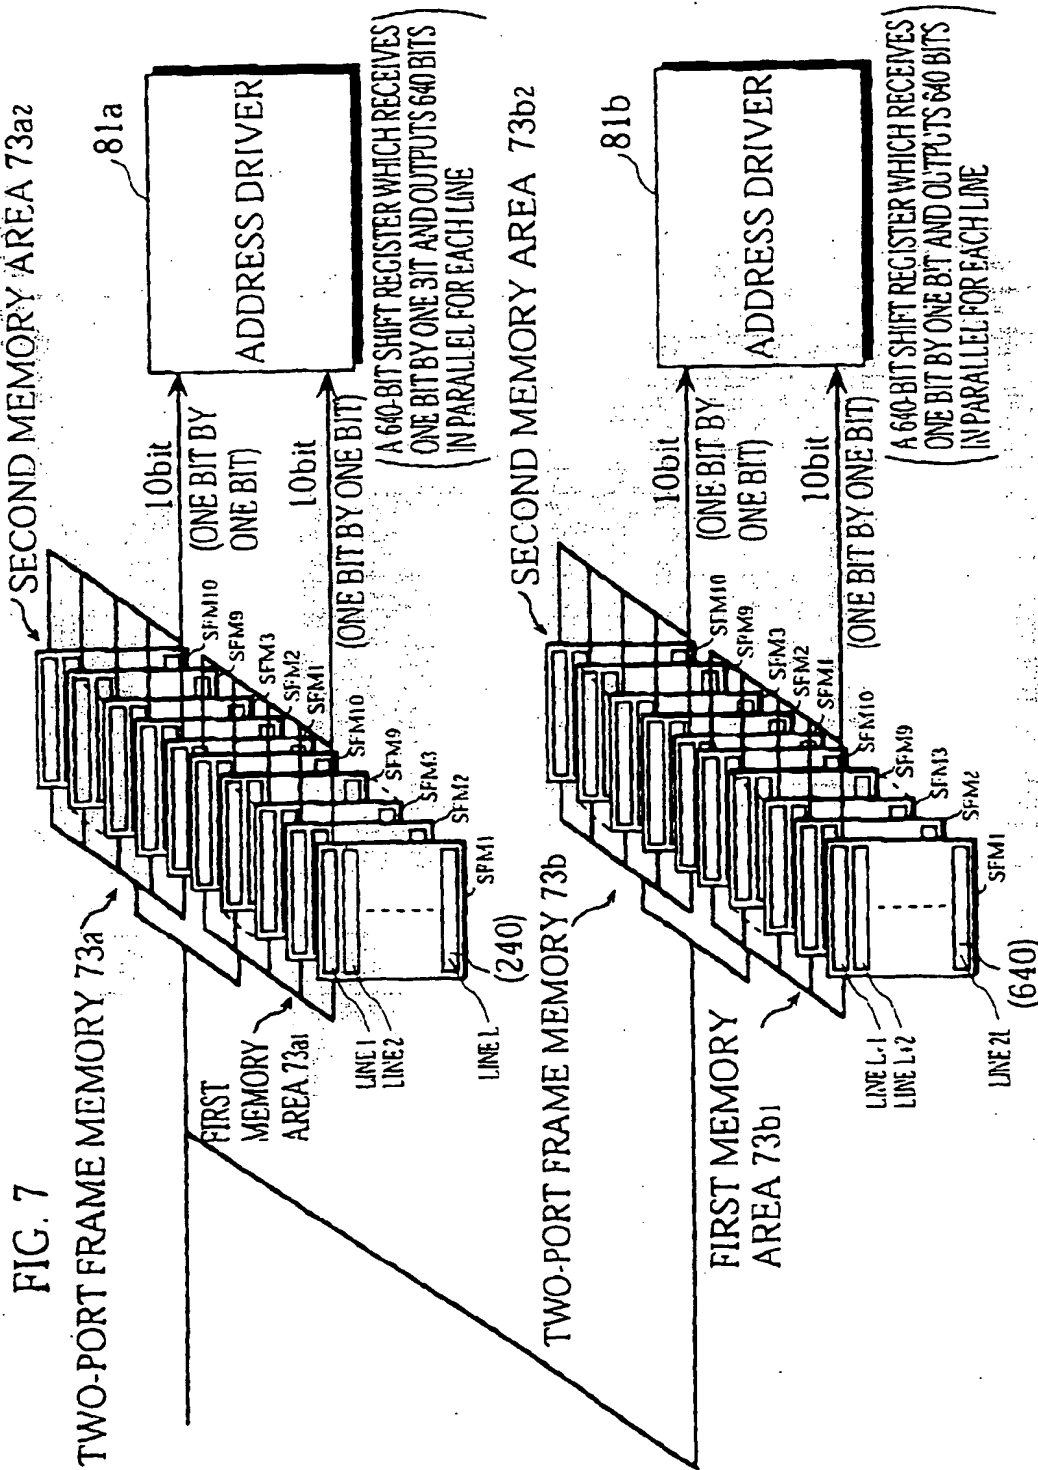

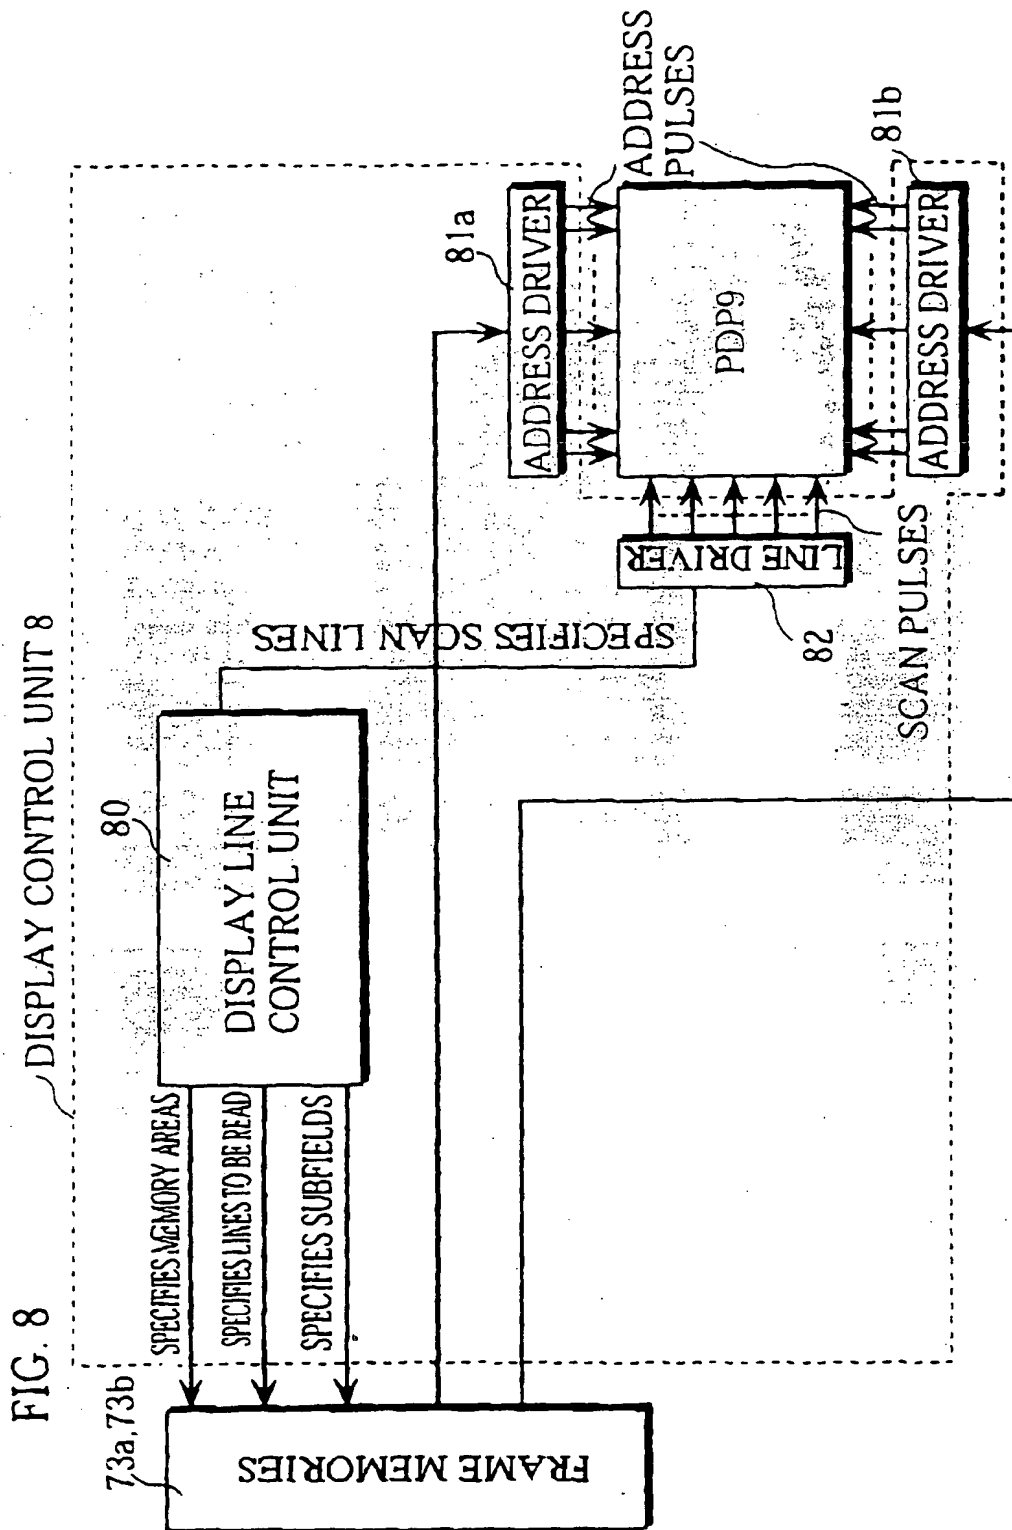


FIG. 9

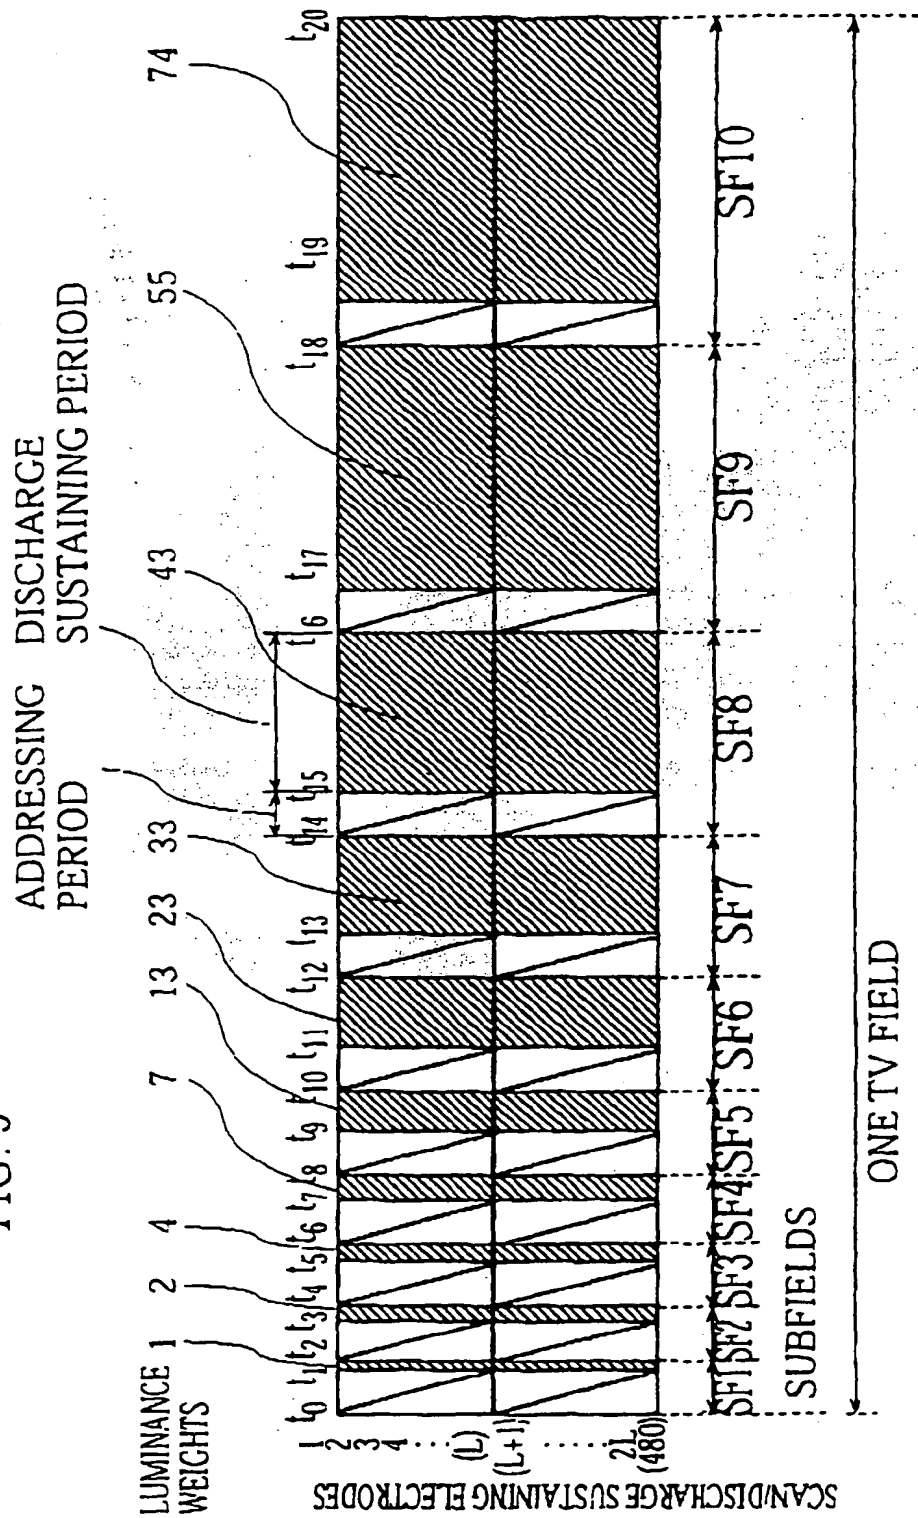


FIG. 10

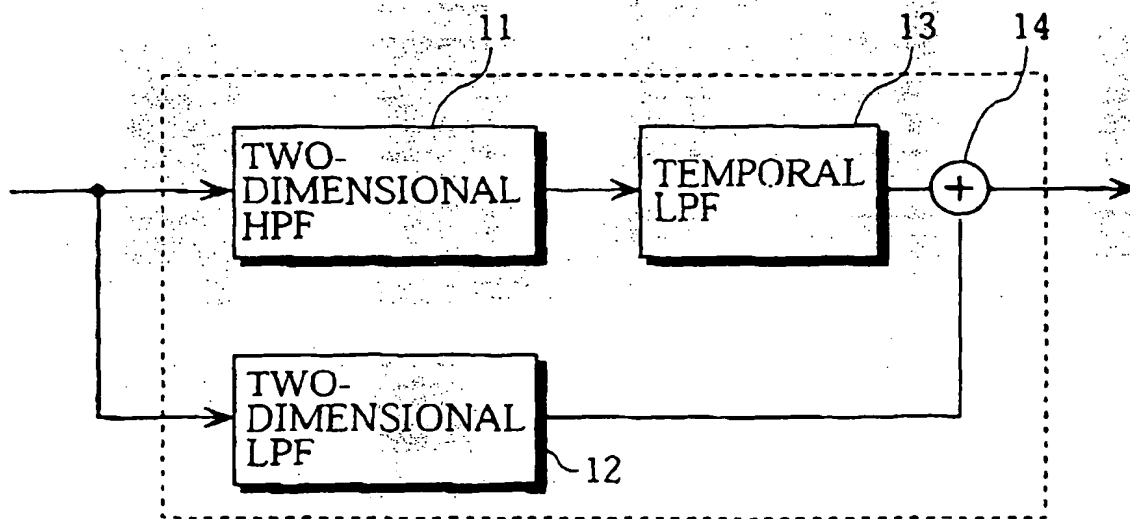


FIG. 11

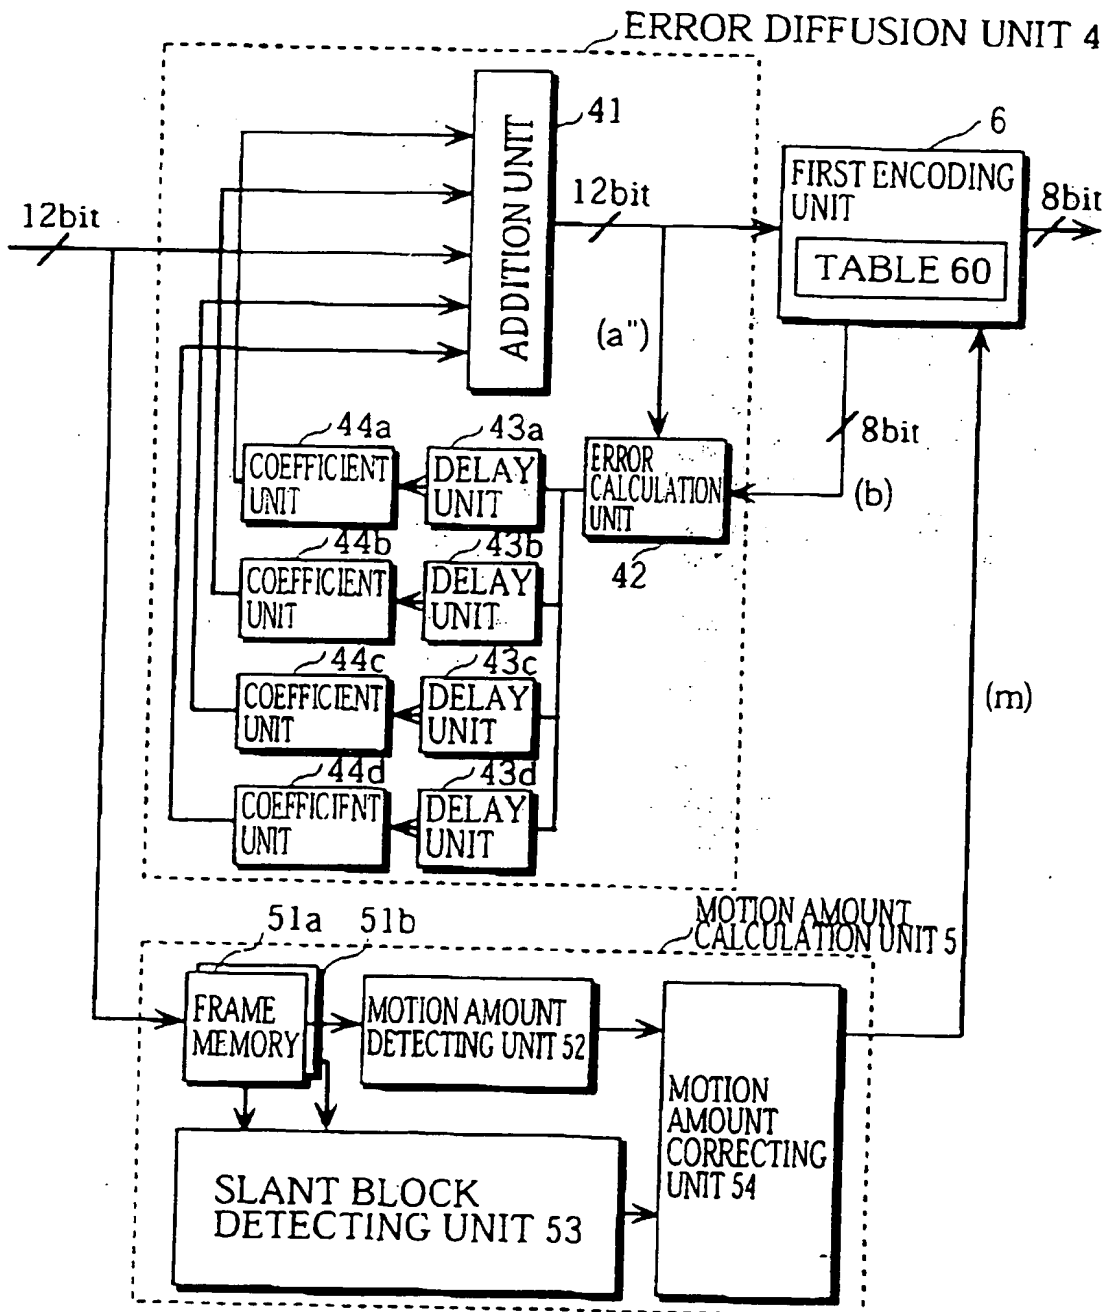




FIG. 12

OUTPUT OF MOTION AMOUNT DETECTING UNIT	OUTPUT OF SLANT BLOCK DETECTING UNIT	OUTPUT OF MOTION AMOUNT CORRECTING UNIT
0000	1111	0000
	0000	0000
0001	1111	0001
	0000	0000
0010	1111	0010
	0000	0000
0011	1111	0011
	0000	0000
0100	1111	0100
	0000	0000
0101	1111	0101
	0000	0000
0110	1111	0110
	0000	0000
0111	1111	0111
	0000	0000
1000	1111	1000
	0000	0000
1001	1111	1001
	0000	0000

FIG. 13

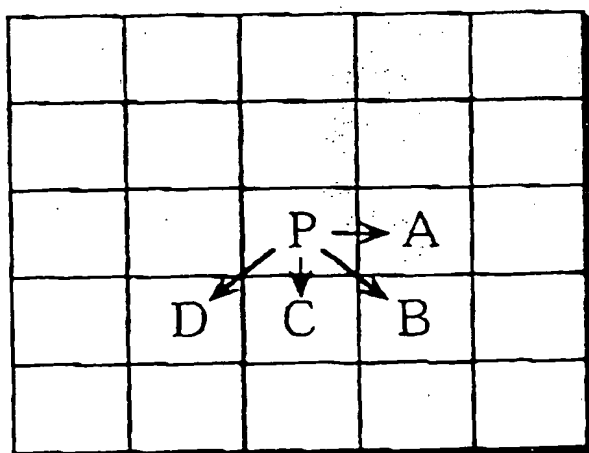


FIG. 14

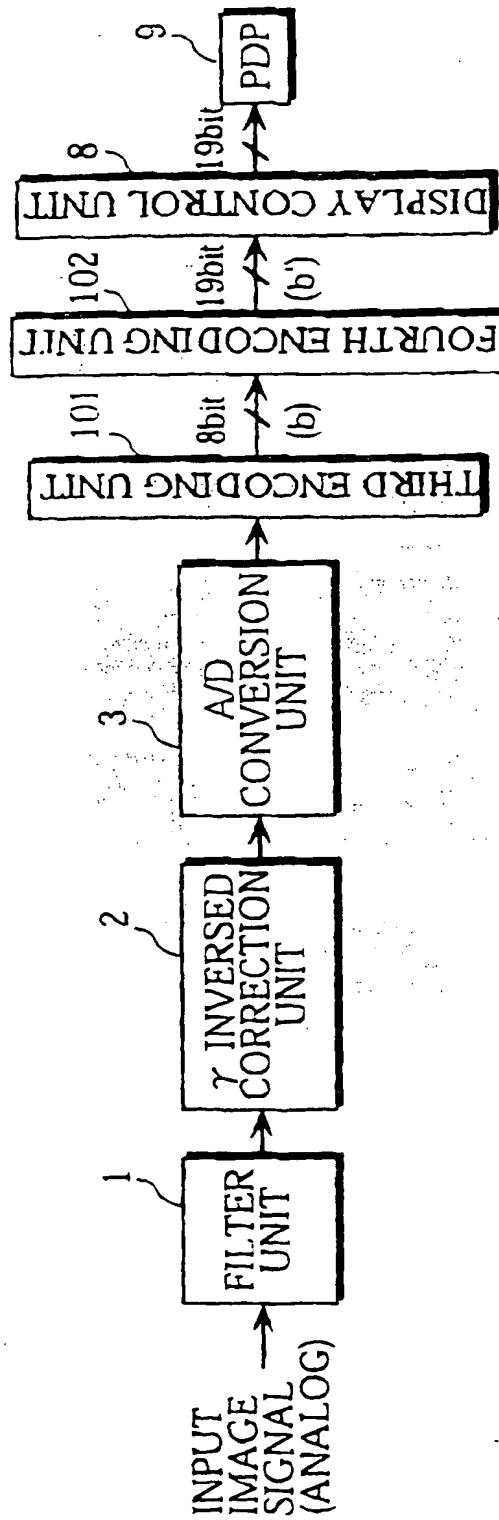


FIG. 15

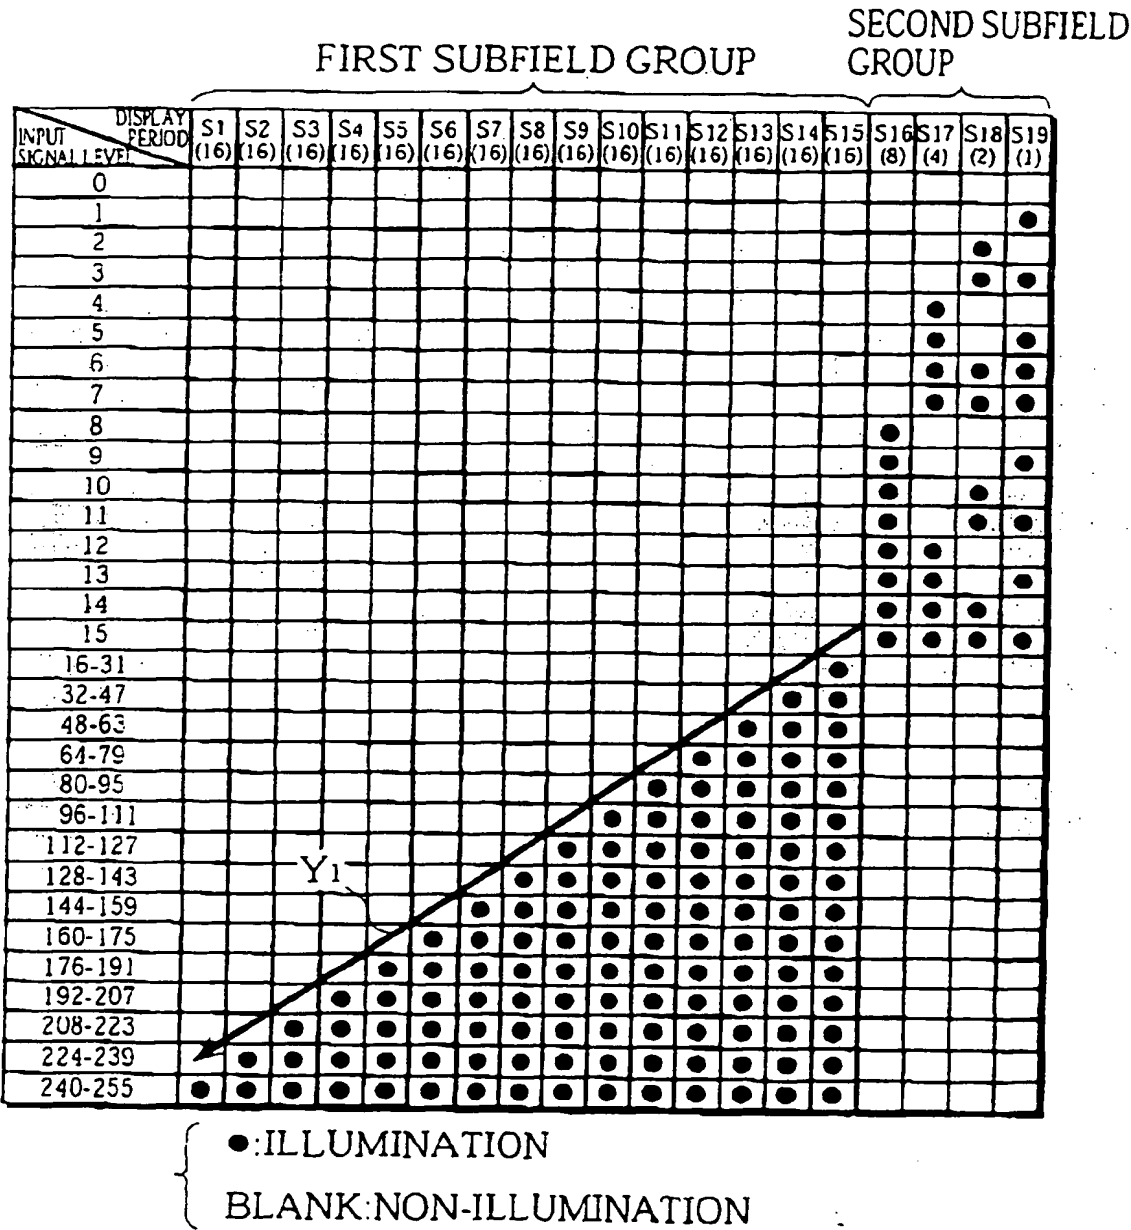


FIG. 16


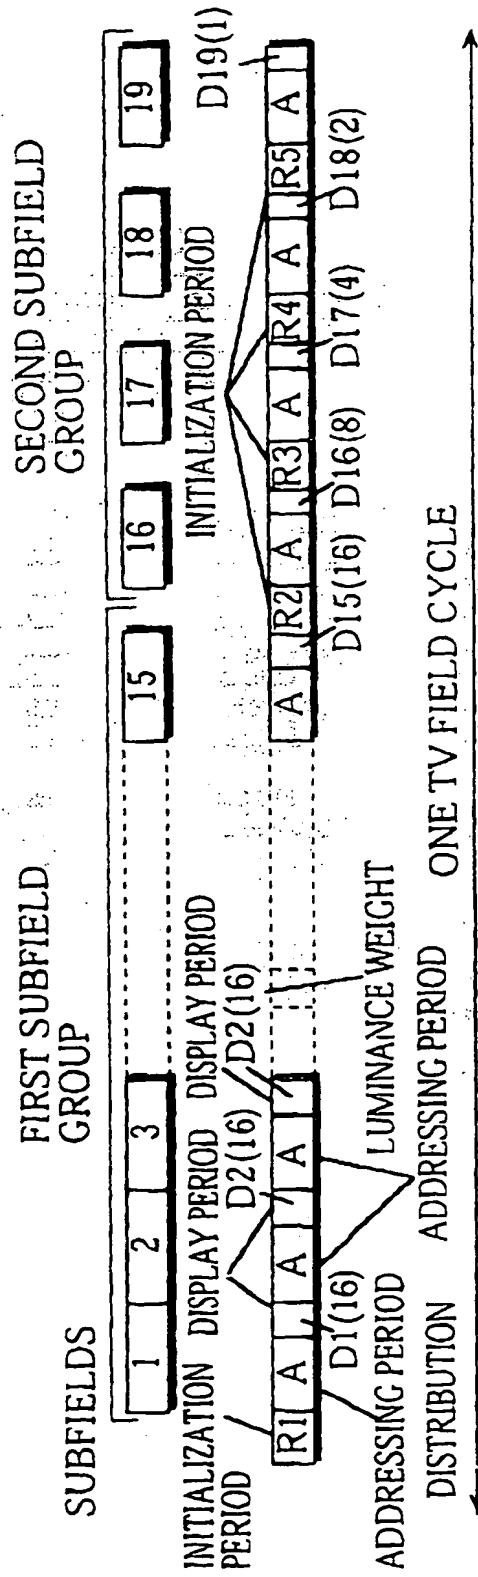


FIG. 17

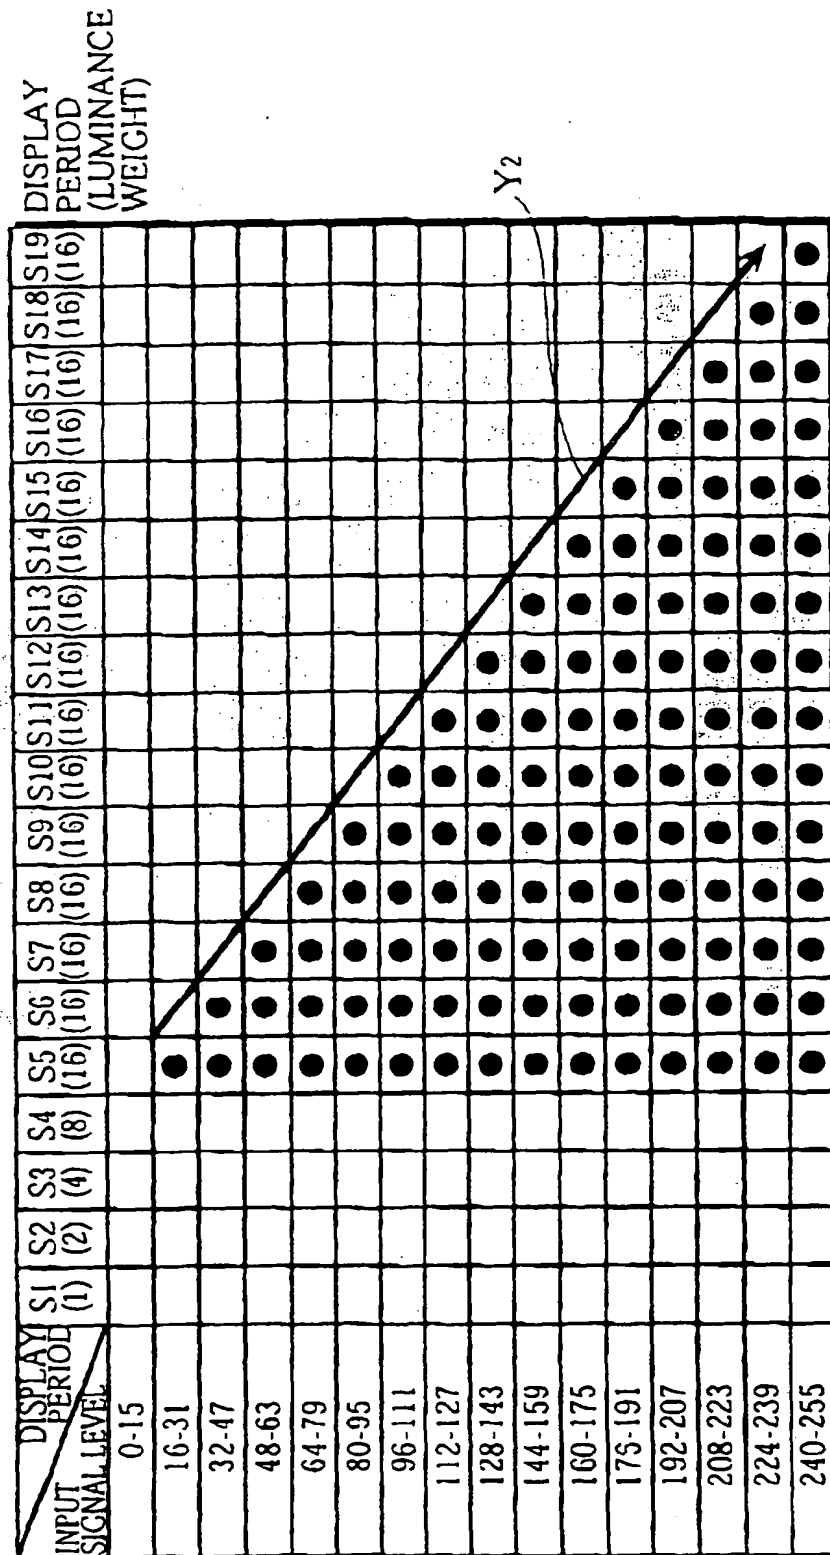

The diagram illustrates the timing of one TV field cycle, divided into subfields and subfield groups. The cycle is represented as a horizontal bar with various segments and labels.

- SUBFIELDS:** The cycle is divided into two main groups of subfields:
  - SECOND SUBFIELD GROUP:** Contains subfields 1, 2, 3, 4, and 5.
  - FIRST SUBFIELD GROUP:** Contains subfields 17, 18, and 19.
- INITIALIZATION PERIOD:** Indicated by a bracket under subfields 1 and 2.
- INITIALIZATION PERIOD DISTRIBUTION:** A bracket labeled  $D2(2)$  spans subfields 1 and 2.
- ADDRESSING PERIOD:** A bracket labeled  $D1(1)$  is under subfield 1.
- ADDRESSING PERIOD DISTRIBUTION:** A bracket labeled  $D3(4)$  spans subfields 1, 2, 3, and 4.
- WRITE WHOLE SCREEN:** A bracket labeled  $D4(8)$  spans subfields 1 through 5.
- ERASE ADDRESSING PERIOD:** A bracket labeled  $D5(16)$  spans subfields 1 through 5.
- ERASE ADDRESSING PERIOD DISTRIBUTION:** A bracket labeled  $D16(16)$  spans subfields 1 through 5.
- ERASE ADDRESSING PERIOD DISTRIBUTION:** A bracket labeled  $D17(16)$  spans subfields 1 through 5.
- ERASE ADDRESSING PERIOD DISTRIBUTION:** A bracket labeled  $D18(16)$  spans subfields 1 through 5.
- ERASE ADDRESSING PERIOD DISTRIBUTION:** A bracket labeled  $D19(16)$  spans subfields 1 through 5.
- ERASE ADDRESSING PERIOD DISTRIBUTION:** A bracket labeled  $D16(16)$  spans subfields 17, 18, and 19.
- ERASE ADDRESSING PERIOD DISTRIBUTION:** A bracket labeled  $D17(16)$  spans subfields 17, 18, and 19.
- ERASE ADDRESSING PERIOD DISTRIBUTION:** A bracket labeled  $D18(16)$  spans subfields 17, 18, and 19.
- ERASE ADDRESSING PERIOD DISTRIBUTION:** A bracket labeled  $D19(16)$  spans subfields 17, 18, and 19.

The diagram shows the distribution of addressing and erasing periods across the subfields and subfield groups, with specific time intervals labeled as  $D1(1)$ ,  $D2(2)$ ,  $D3(4)$ ,  $D4(8)$ ,  $D5(16)$ ,  $D16(16)$ ,  $D17(16)$ ,  $D18(16)$ , and  $D19(16)$ .

FIG. 19

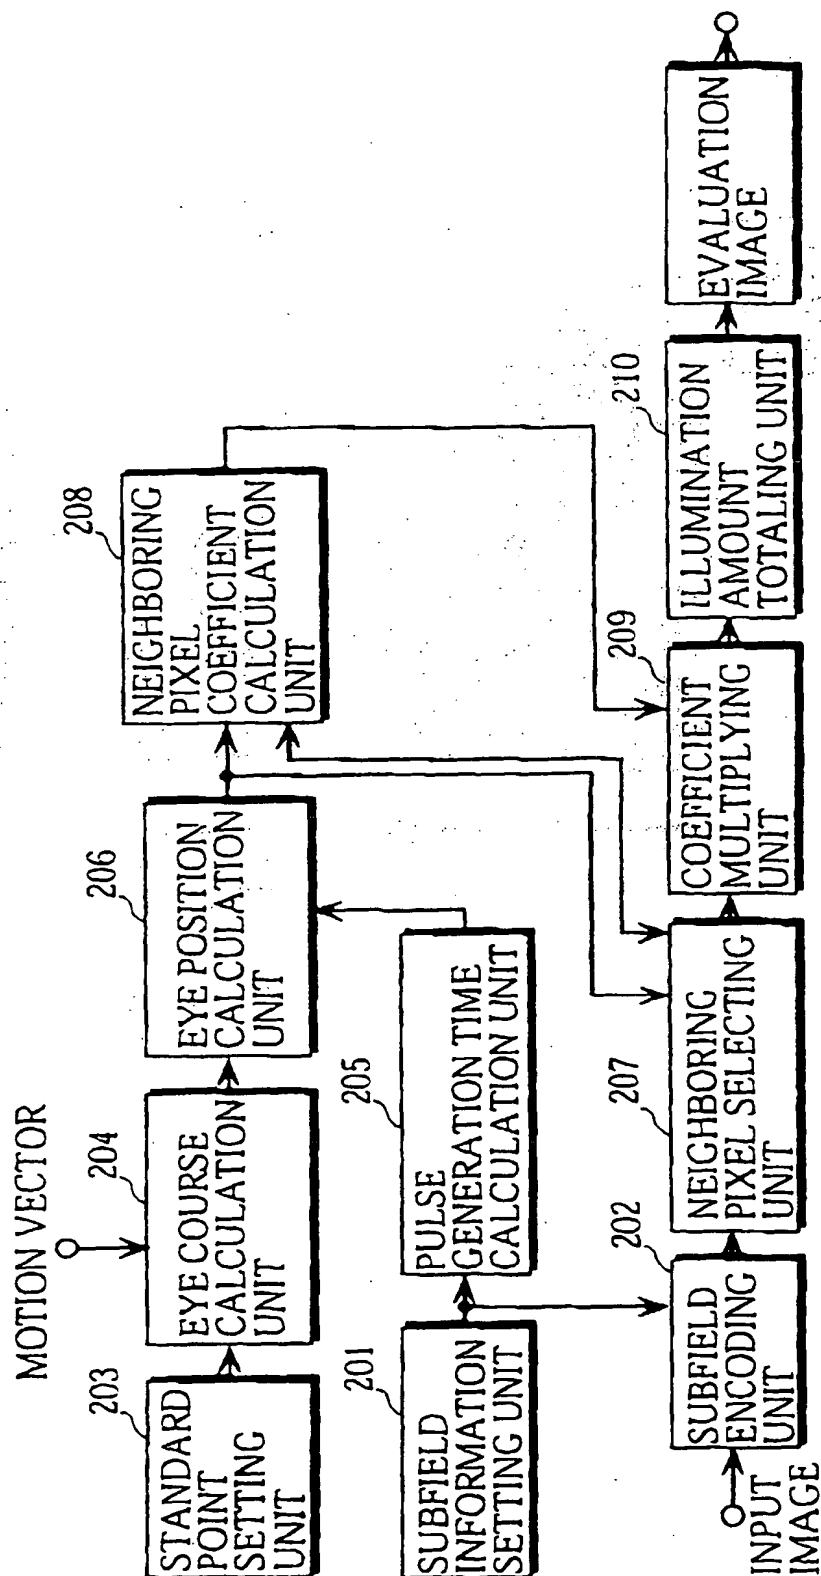




FIG. 20

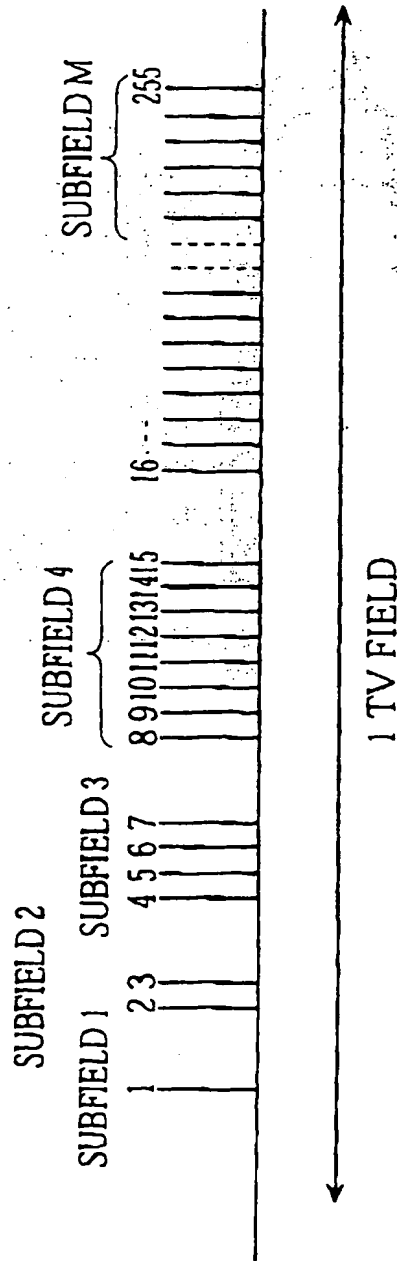


FIG. 21

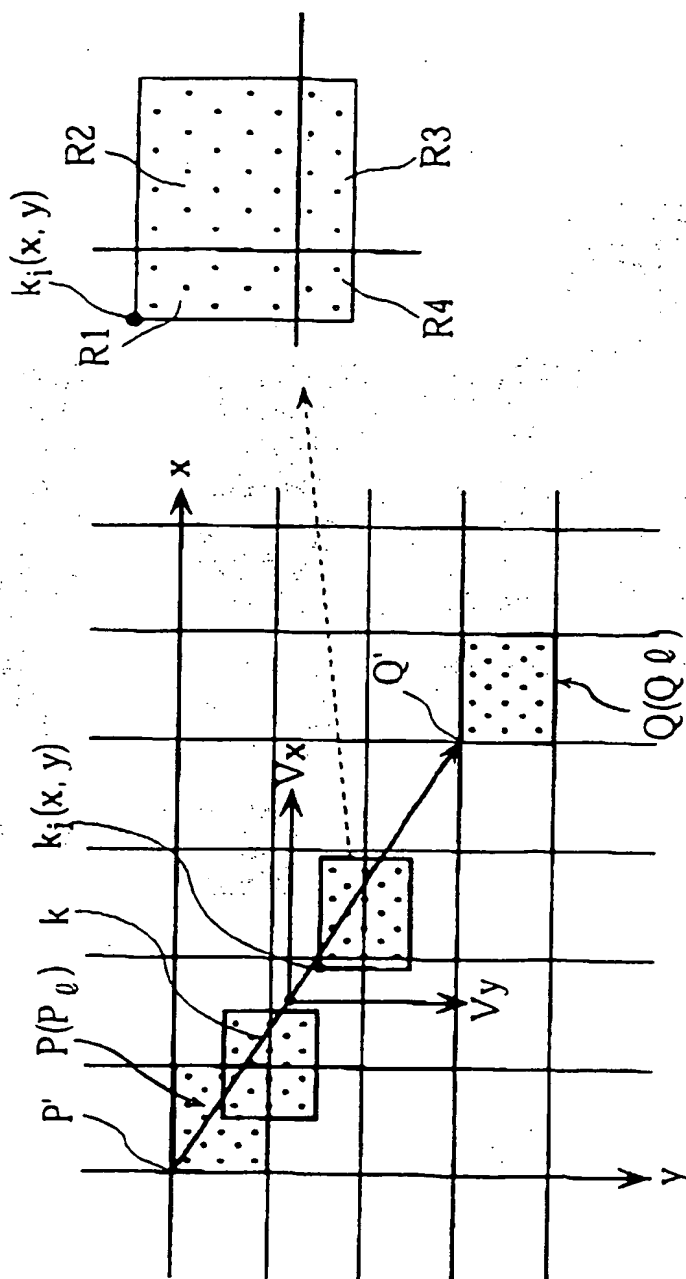


FIG. 22

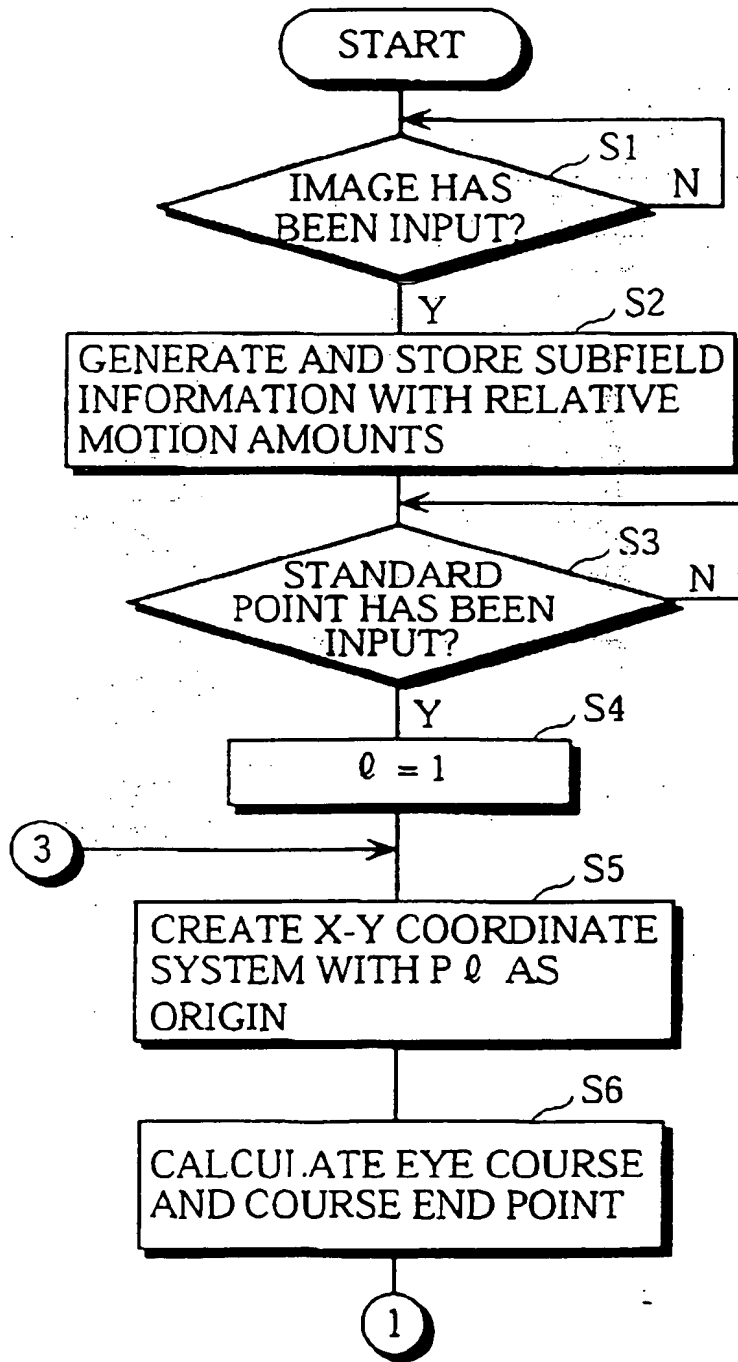


FIG. 23

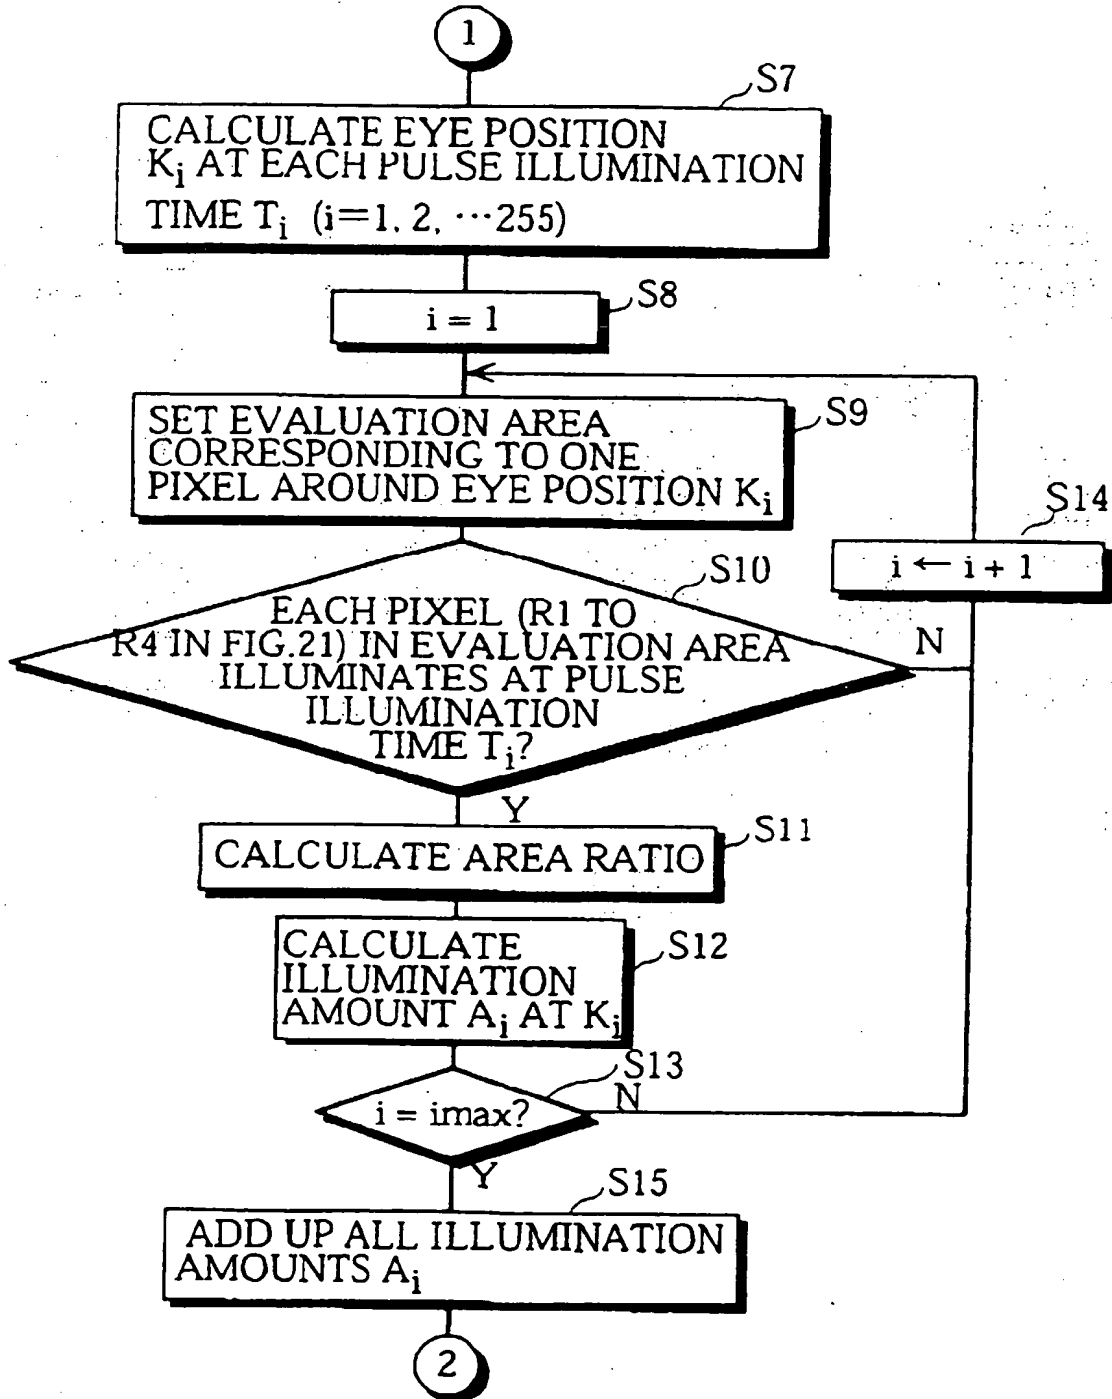


FIG. 24

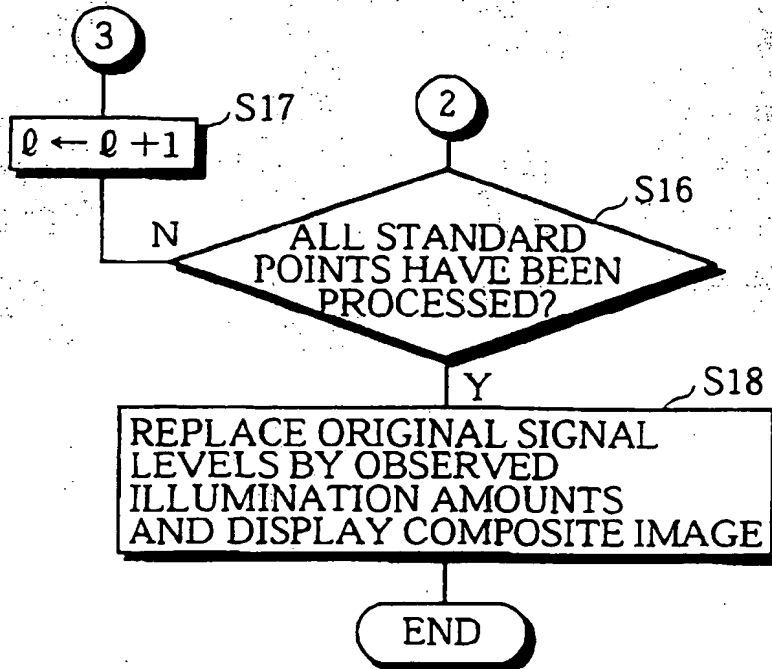


FIG. 25

PIXEL POSITION	SUBFIELDS								MOTION VECTOR $\vec{MV}$
	SF1	SF2	SF3	SF4	SF5	SF6	SF7	SF8	
$P(1,1)$	●	●	●						$\vec{MV}_{(1,1)}$
$P(1,2)$	●	●	●	●					$\vec{MV}_{(1,2)}$
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
$P(1,m)$	●	●	●						$\vec{MV}_{(1,m)}$
$P(2,1)$	●	●	●						$\vec{MV}_{(2,1)}$
$P(2,2)$	●			●					$\vec{MV}_{(2,2)}$
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
$P(2,m)$	●		●						$\vec{MV}_{(2,m)}$
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
$P(n,1)$	●	●	●	●	●				$\vec{MV}_{(n,1)}$
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
$P(n,m)$	●		●	●	●				$\vec{MV}_{(n,m)}$

( ● INDICATES ILLUMINATION)

FIG. 26

	PULSE ILLUMINATION TIME
SUBFIELD SF1	$t_1$
SUBFIELD SF2	$t_2, t_3$
SUBFIELD SF3	$t_4, t_5, t_6, t_7$
$\vdots$	
SUBFIELD SF8	$t_{128}, \dots, t_{255}$

FIG. 27

WEIGHT FOR SUBFIELD INPUT LEVEL	1	2	4	8	16	32	64	128	ENCODED LEVEL
0									0
1	●								1
2-5	●	●							3
6-11	●	●	●						7
12-23	●	●	●	●					15
24-47	●	●	●	●	●				31
48-95	●	●	●	●	●	●			63
96-191	●	●	●	●	●	●	●		127
192-255	●	●	●	●	●	●	●	●	255



FIG. 28

	WEIGHT FOR SUBFIELD INPUT LEVEL	1	2	4	8	16	32	64	128	ENCODED LEVEL
1	0									0
2	1	●								1
3	2		●							2
4	3	●	●							3
5	4			●						4
6	5	●		●						5
7	6		●	●						6
8	7-11	●	●	●						7
9	12-23	●	●	●	●					15
10	24-47	●	●	●	●	●				31
11	48-95	●	●	●	●	●	●			63
12	96-191	●	●	●	●	●	●	●		127
13	192-255	●	●	●	●	●	●	●	●	255

FIG. 29

	WEIGHT FOR SUBFIELD INPUT LEVEL	1	2	4	8	16	32	64	128	ENCODED LEVEL
1	0									0
2	1	●								1
3	2		●							2
4	3	●	●							3
5	4			●						4
6	5	●		●						5
7	6		●	●						6
8	7-10	●	●	●						7
9	11-23	●	●	●	●					15
10	24-47	●	●	●	●	●				31
11	48-59	●	●	●		●	●			55
12	60-87	●	●	●	●	●	●			63
13	88-119	●	●	●	●		●	●		111
14	120-175	●	●	●	●	●	●	●		127
15	176-239	●	●	●	●	●		●	●	223
16	240-255	●	●	●	●	●	●	●	●	255

FIG. 30

(a)	WEIGHTS FOR SUBFIELDS										(b)
	10	9	8	7	6	5	4	3	2	1	
INPUT LEVEL	7	6	5	4	3	2	1	0	7	6	CONVERSION OUTPUT
0											0
1											1
2											2
3											3
4											4
5											5
6											6
7											7
8											8
9											9
10											10
11											11
12											12
13											13
14											14
15											15
16											16
17											17
18											18
19											19
20											20
21											21
22											22
23											23
24											24
25											25
26											26
27											27
28											28
29											29
30											30
31											31
32											32
33											33
34											34
35											35
36											36
37											37
38											38
39											39
40											40
41											41
42											42
43											43
44											44
45											45
46											46
47											47
48											48
49											49
50											50
51											51
52											52
53											53
54											54
55											55
56											56
57											57
58											58
59											59
60											60
61											61
62											62
63											63
64											64
65											65
66											66
67											67
68											68

FIG. 31

(a)	WEIGHTS FOR SUBFIELDS								(b)
	10	9	8	7	6	5	4	3	
INPUT LEVEL	7	4	5	6	3	3	2	1	CONVERSION OUTPUT
69									110
70									111
71									114
72									115
73									116
74									117
75									118
76									119
77									121
78									122
79									123
80									124
81									125
82									126
83									127
84									181
85									182
86									183
87									185
88									186
89									187
90									188
91									189
92									190
93									191
94									213
95									214
96									215
97									217
98									218
99									219
100									220
101									221
102									222
103									223
104									224
105									230
106									231
107									233
108									234
109									235
110									236
111									237
112									238
113									239
114									242
115									243
116									244
117									245
118									246
119									247
120									249
121									250
122									251
123									252
124									253
125									254
126									255
127									371
128									372
129									373
130									374
131									375
132									377
133									378
134									379
135									380
136									381
137									382
138									383

FIG. 32

(a)	WEIGHTS FOR SUBFIELDS										(b)
	10	9	8	7	6	5	4	3	2	1	
INPUT LEVEL	74	56	43	33	23	13	7	4	2	1	CONVERSION OUTPUT
139											437
140											438
141											439
142											441
143											442
144											443
145											444
146											445
147											446
148											447
149											469
150											470
151											471
152											473
153											474
154											475
155											476
156											477
157											478
158											479
159											485
160											486
161											487
162											489
163											490
164											491
165											492
166											493
167											494
168											495
169											498
170											499
171											500
172											501
173											502
174											503
175											505
176											506
177											507
178											508
179											509
180											510
181											511
182											746
183											747
184											748
185											749
186											750
187											751
188											754
189											755
190											756
191											757
192											758
193											759
194											761
195											762
196											763
197											764
198											765
199											766
200											787
201											883
202											884
203											885
204											886
205											887
206											889
207											890
208											891

FIG. 33

(a)	WEIGHTS FOR SUBFIELDS										(b)
	10	9	8	7	6	5	4	3	2	1	
INPUT LEVEL	74	56	3	83	23	3	7	4	2	1	CONVERSION OUTPUT
209	1	1	1	1	1	1	1	1	1	1	892
210	1	1	1	1	1	1	1	1	1	1	893
211	1	1	1	1	1	1	1	1	1	1	894
212	1	1	1	1	1	1	1	1	1	1	895
213	1	1	1	1	1	1	1	1	1	1	949
214	1	1	1	1	1	1	1	1	1	1	950
215	1	1	1	1	1	1	1	1	1	1	951
216	1	1	1	1	1	1	1	1	1	1	953
217	1	1	1	1	1	1	1	1	1	1	954
218	1	1	1	1	1	1	1	1	1	1	955
219	1	1	1	1	1	1	1	1	1	1	956
220	1	1	1	1	1	1	1	1	1	1	957
221	1	1	1	1	1	1	1	1	1	1	958
222	1	1	1	1	1	1	1	1	1	1	959
223	1	1	1	1	1	1	1	1	1	1	981
224	1	1	1	1	1	1	1	1	1	1	982
225	1	1	1	1	1	1	1	1	1	1	983
226	1	1	1	1	1	1	1	1	1	1	985
227	1	1	1	1	1	1	1	1	1	1	986
228	1	1	1	1	1	1	1	1	1	1	987
229	1	1	1	1	1	1	1	1	1	1	988
230	1	1	1	1	1	1	1	1	1	1	989
231	1	1	1	1	1	1	1	1	1	1	990
232	1	1	1	1	1	1	1	1	1	1	991
233	1	1	1	1	1	1	1	1	1	1	997
234	1	1	1	1	1	1	1	1	1	1	998
235	1	1	1	1	1	1	1	1	1	1	999
236	1	1	1	1	1	1	1	1	1	1	1001
237	1	1	1	1	1	1	1	1	1	1	1002
238	1	1	1	1	1	1	1	1	1	1	1003
239	1	1	1	1	1	1	1	1	1	1	1004
240	1	1	1	1	1	1	1	1	1	1	1005
241	1	1	1	1	1	1	1	1	1	1	1006
242	1	1	1	1	1	1	1	1	1	1	1007
243	1	1	1	1	1	1	1	1	1	1	1010
244	1	1	1	1	1	1	1	1	1	1	1011
245	1	1	1	1	1	1	1	1	1	1	1012
246	1	1	1	1	1	1	1	1	1	1	1013
247	1	1	1	1	1	1	1	1	1	1	1014
248	1	1	1	1	1	1	1	1	1	1	1015
249	1	1	1	1	1	1	1	1	1	1	1017
250	1	1	1	1	1	1	1	1	1	1	1018
251	1	1	1	1	1	1	1	1	1	1	1019
252	1	1	1	1	1	1	1	1	1	1	1020
253	1	1	1	1	1	1	1	1	1	1	1021
254	1	1	1	1	1	1	1	1	1	1	1022
255	1	1	1	1	1	1	1	1	1	1	1023

FIG. 34

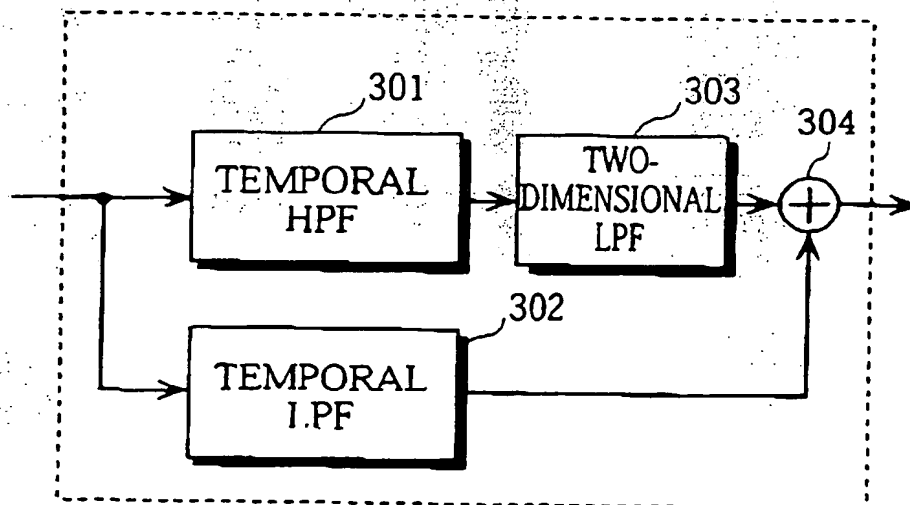


FIG. 35

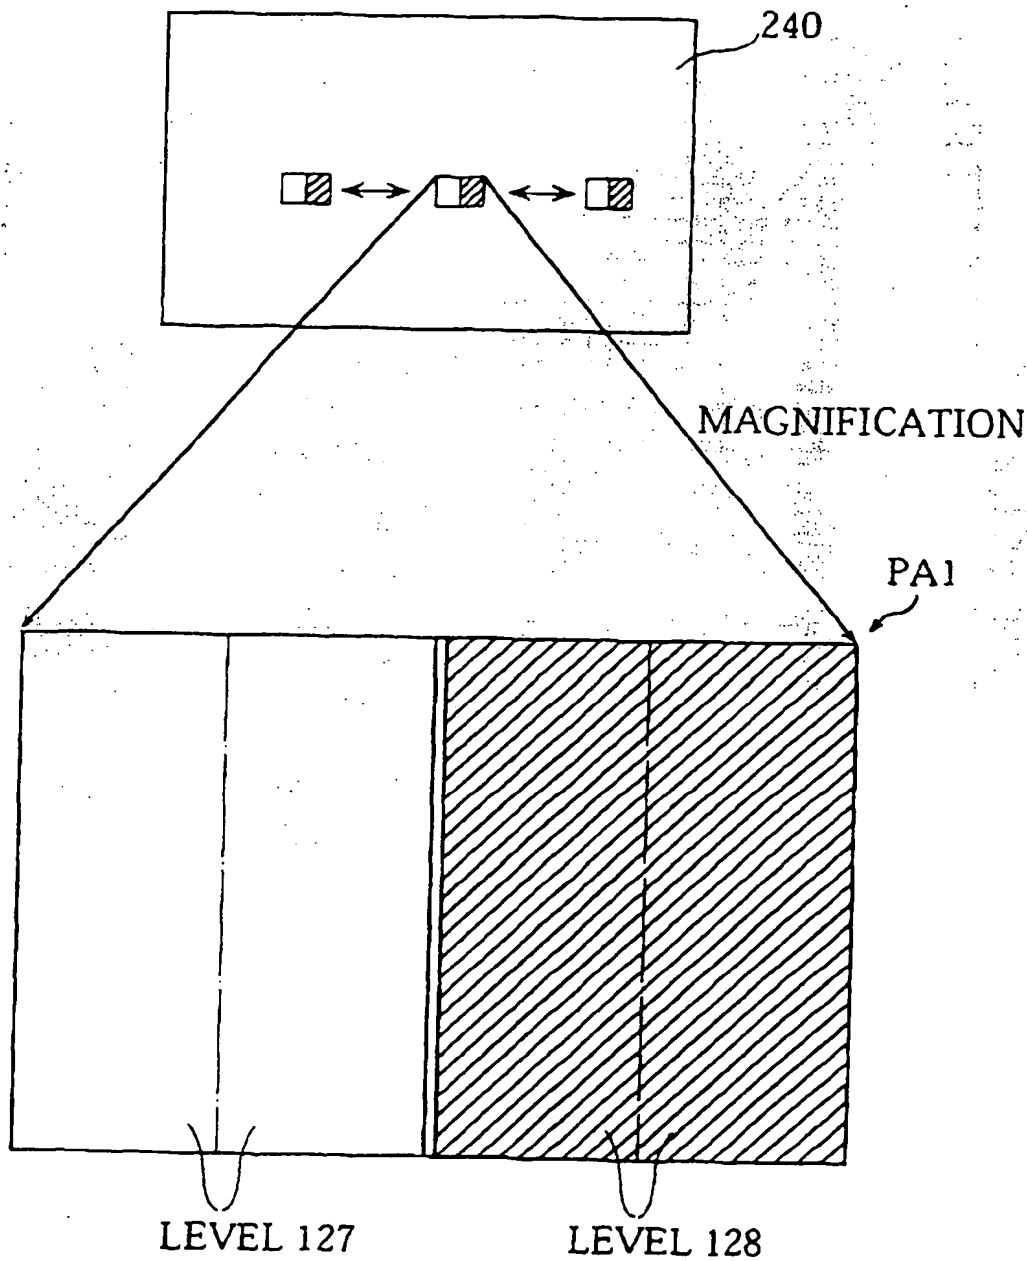




FIG. 36



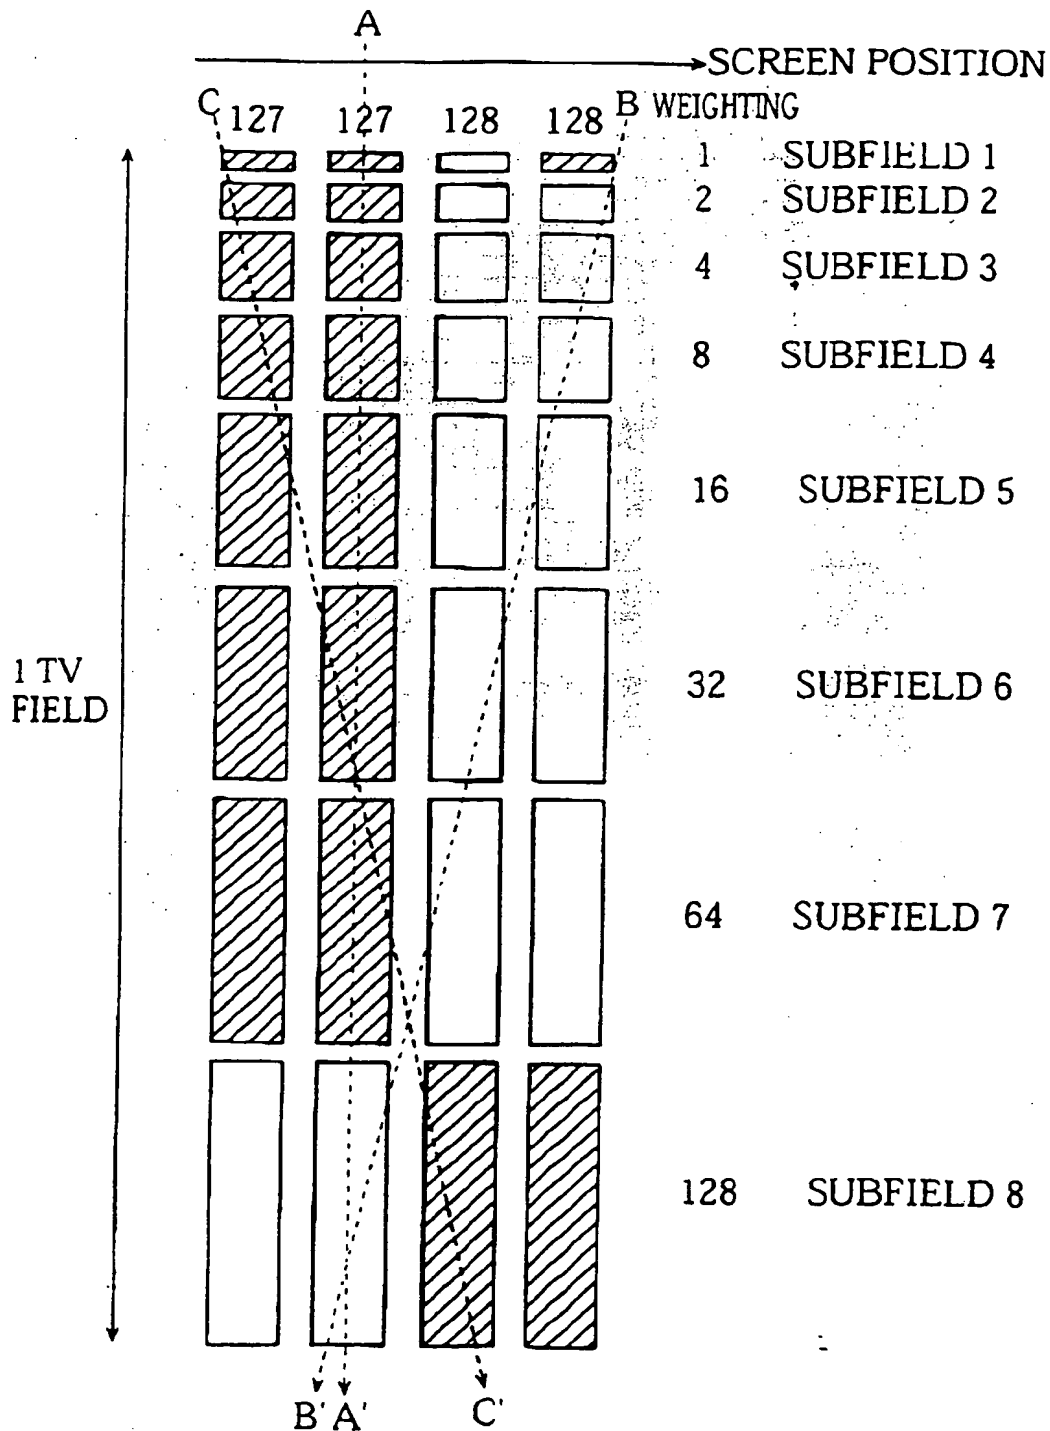


FIG. 37



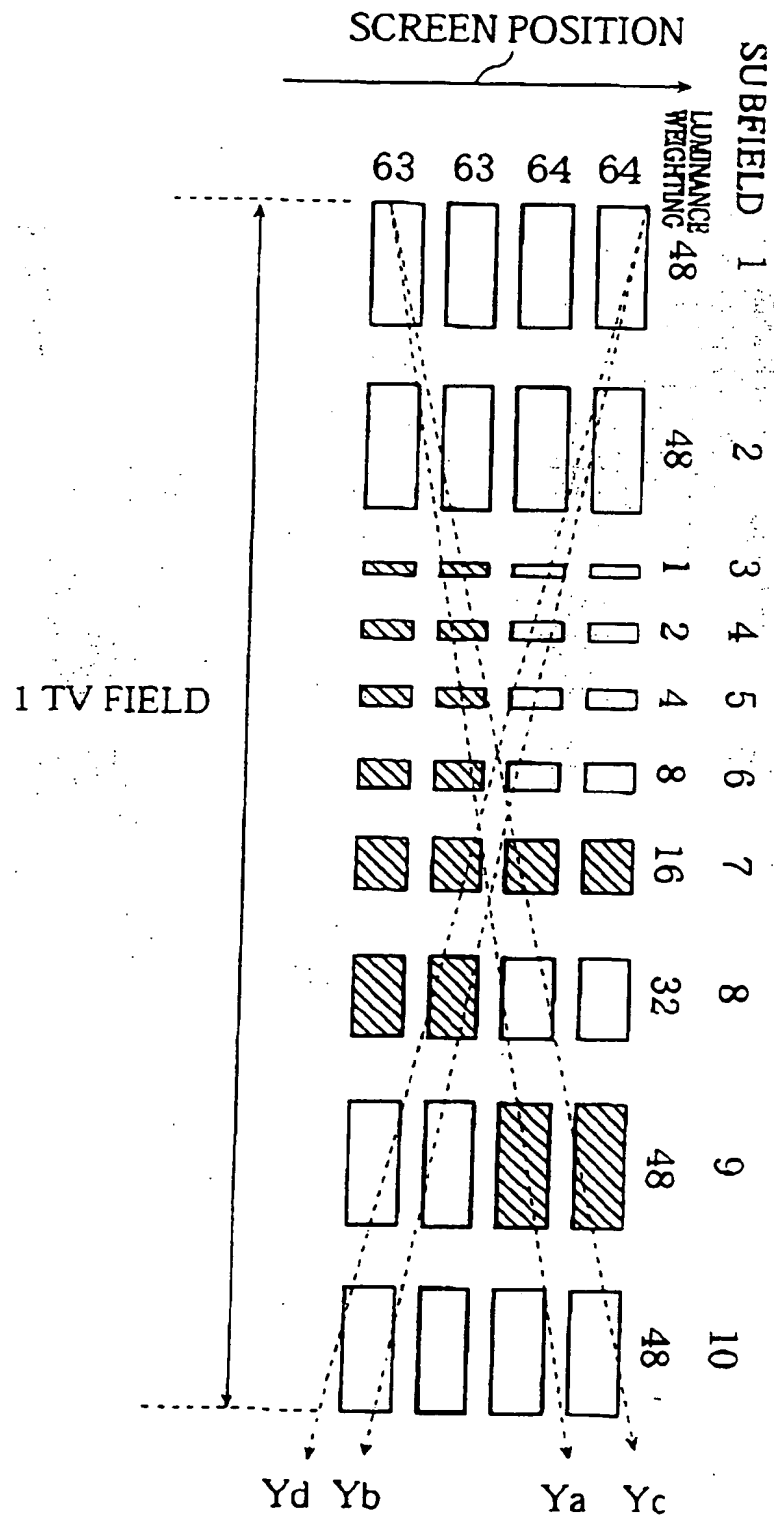

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 0 893 916 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
18.10.2000 Bulletin 2000/42

(51) Int Cl.7: **H04N 5/70, G09G 3/28**

(43) Date of publication A2:  
27.01.1999 Bulletin 1999/04

(21) Application number: **98305888.4**

(22) Date of filing: **23.07.1998**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(30) Priority: **24.07.1997 JP 19814197**  
**28.07.1997 JP 20127397**  
**18.11.1997 JP 31676897**  
**04.12.1997 JP 33386397**  
**11.12.1997 JP 34111697**

(71) Applicant: **MATSUSHITA ELECTRIC INDUSTRIAL  
CO., LTD.**  
**Kadoma-shi, Osaka-fu, 571 (JP)**

(72) Inventors:  
• **Kawahara, Isao**  
**Toyono-gun, Osaka-fu, 563-0214 (JP)**  
• **Sekimoto, Kunio**  
**Katano-shi, Osaka-fu, 576-0012 (JP)**

(74) Representative: **Crawford, Andrew Birkby et al**  
**A.A. Thornton & Co.**  
**235 High Holborn**  
**London WC1V 7LE (GB)**

(54) **Image display apparatus and image evaluation apparatus**

(57) An image display apparatus which displays images, suppressing the occurrence of the moving image false edge. The image display apparatus selects a signal level among a plurality of signal levels in accordance

with a motion amount of an input image signal, where each signal level is expressed by an arbitrary combination of 0, W1, W2, ... and WN and luminance weights W1, W2, ... and WN are assigned to subfields.

EP 0 893 916 A3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 98 30 5888

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.CI.6)
X	FR 2 740 253 A (FUJITSU LTD.) 25 April 1997 (1997-04-25)	1,2,4-8, 14,15, 20-22,43	H04N5/70 G09G3/28
A	* abstract *	3,9-13, 16-19, 23,24, 35-37, 44,45	
	* page 62, line 20 - page 67, line 9 *		
	* page 69, line 10 - page 74, line 14 *		
	* page 75, line 6 - line 31; figures 69-79 *		
X	--- PATENT ABSTRACTS OF JAPAN vol. 1995, no. 05, 30 June 1995 (1995-06-30) & JP 07 049663 A (NEC CORP), 21 February 1995 (1995-02-21)	25-31	
A	* abstract *	32-34	
A	--- EP 0 698 874 A (TEXAS INSTRUMENTS INC.) 28 February 1996 (1996-02-28) * abstract *	25-34	TECHNICAL FIELDS SEARCHED (Int.CI.6)
	* column 2, line 6 - line 17 *		G09G
	* column 5, line 46 - column 6, line 13; figures 1-6 *		H04N
A	--- SANO Y ET AL: "A FULL-COLOR SURFACE-DISCHARGE AC PLASMA TV DISPLAY" SID INTERNATIONAL SYMPOSIUM DIGEST OF TECHNICAL PAPERS, US, PLAYA DEL REY, SID, vol. 22, 6 May 1991 (1991-05-06), pages 728-731, XP000503118 ISSN: 0097-966X * abstract *	25-37	
	* page 222, right-hand column, line 7 - page 223, right-hand column, line 12; figures 4,5 *		
	--- -/--		
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 15 August 2000	Examiner O'Reilly, D
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &amp;: member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (P/4C01)



European Patent  
Office

Application Number

EP 98 30 5888

#### CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):

☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

#### LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.

☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.

☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:

☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 98 30 5888

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	ZHU Y -W ET AL: "15.3: A MOTION-DEPENDENT EQUALIZING-PULSE TECHNIQUE FOR REDUCING GRAY-SCALE DISTURBANCES ON PDPS" SID INTERNATIONAL SYMPOSIUM DIGEST OF TECHNICAL PAPERS,US,SANTA ANA, SID, vol. 28, 13 May 1997 (1997-05-13), pages 221-224, XP000722692 ISSN: 0097-966X * abstract * * page 222, right-hand column, line 26 - page 223, left-hand column, line 34; figures 2-5 *	38-42, 46-48	
X,P	EP 0 822 536 A (FUJITSU LTD.) 4 February 1998 (1998-02-04) * abstract * * page 2, line 14 - line 58 * * page 8, line 1 - line 22 * * page 10, line 22 - line 25 * * page 12, line 47 - line 55; figures 1-64 *	38-42, 46-48	
A	PATENT ABSTRACTS OF JAPAN vol. 1996, no. 09, 30 September 1996 (1996-09-30) & JP 08 123355 A (FUJITSU GENERAL LTD.), 17 May 1996 (1996-05-17) * abstract *	38-42, 46-48	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
Place of search THE HAGUE		Date of completion of the search 15 August 2000	Examiner O'Reilly, D
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P04C01)



European Patent  
Office

LACK OF UNITY OF INVENTION  
SHEET B

Application Number  
EP 98 30 5888

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims: 1-24, 43-45

1) Image display apparatus with greyscale in accordance with a motion amount.

2) An image display apparatus with a filter means to suppress high frequency time and spatial components of the input signal.

2. Claims: 25-37

Image display apparatus with subfields that extend either forward or backward over time.

3. Claims: 38-42, 46-48

An evaluation apparatus for moving images.

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 30 5888

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-08-2000

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
FR 2740253	A	25-04-1997	JP 10031455	A	03-02-1998
JP 07049663	A	21-02-1995	JP 2639311	B	13-08-1997
EP 698874	A	28-02-1996	JP 8063122	A	08-03-1996
			US 5619228	A	08-04-1997
EP 822536	A	04-02-1998	JP 10039828	A	13-02-1998
			US 5907316	A	25-05-1999
JP 08123355	A	17-05-1996	NONE		

EPO FORM P0429

For more details about this annex see Official Journal of the European Patent Office No. 12/82